For Office Use Only Application # 5710 - 63 Date	Received 10/30/07 By LH Permit # 1472 (26412
Application Approved by - Zoning Official Dat	te 1/8/07 Plans Examiner OK 57# Date 10-3+07
Flood Zone Development Permit WA Zoni	ing <u>(LSF-2</u> Land Use Plan Map Category <u>RLP</u>
Comments 107-08/5-N City Water Min Gloor	A
wa clw. John.	
Applicants Name Hugo Escalante	Phone _3862888666
Address P.O.BOX 280 Ford Whide, FC	
Owners Name Hogo Estatante EWPL	, INC. Phone 3862888666
911 Address 456 S.W. Morning Glory DR,	Lake City, FL 32056
Contractors Name Hugo Exalande CEWPL TR	C) Phone 3862888666
Address P.O. Box 280, Food White, FC	32038
Fee Simple Owner Name & Address	
Bonding Co. Name & Address None	
Architect/Engineer Name & Address Dance / Shahaen,	Lake Cody, FC
Mortgage Lenders Name & Address Vone	
Circle the correct power company - FL Power & Light - Cl	av Fleci - Suwannee Valley Floo - Progressive France
Property ID Number 15-45-16-03023-519	Felimated Cost of Construction #150 and #1
Driving Directions 347 South, Turn left on C	Lot <u>/9</u> Block Unit Phase
to end on right	4/1Ghan, 1/K on Morning 6-long
a di laying	-3
Type of Construction SFA	New Land Control of the Control of t
	Number of Existing Dwellings on Property
Total Acreage 1/2 Lot Size Sacre Do you need a - Co	iver Remit or Culvert Walver of Have an Existing Drive
Actual Distance of Structure from Property Lines - Front	Side Side Rear Rear
Total Building Height/ Number of Stories	Heated Floor Area 1755 GPT Roof Pitch 6-12
Application is hereby made to obtain a permit to do work and i	
installation has commenced prior to the issuance of a permit a all laws regulating construction in this jurisdiction.	installations as indicated. I certify that no work or and that all work be performed to meet the standards of
OWNERS AFFIDAVIT: I hereby certify that all the formation a	
OWNERS AFFIDAVIT: I hereby certify that all the foregoing info compliance with all applicable laws and regulating constructio	
WARNING TO OWNER! YOUR EARLINE TO BECOME A ALLENDER	
TWICE FOR IMPROVEMENTS TO YOUR PROPERTY. IF YOU IN ENDER OR ATTORNEY BEFORE RECORDING YOUR NOTICE	TEND TO OBTAIN FINANCING, CONSULT WITH YOUR
// 1C //	OF COMMENCEMENT.
Augo Cacalora	Assol Ochur
Dwner Builder or Agent (Including Contractor)	Contractor Signature
STATE OF FLORIDA COUNTY OF COLUMBIA	Contractors License Number <u>CRC/326967</u> Competency Card Number
	NOTARY STAMP STAMP MY COMMISSION # DD 27984
Sworn to (or affirmed) and subscribed before me his 30 day of 00 40 00 20 07	EXPIRES: March 9, 2009 Bonded That Notary Public Underpriters
Personally known or Produced Identification PLD	- Marie Bollen
or Froduced Identification Management	Notary Signature


NOTICE OF COMMENCEMENT		
Fax Parcel Identification Number 15-45-16-03023-51	County C	Clerk's Office Stamp or Seal
HE UNDERSIGNED hereby gives notice that improvements will be made lorida Statutes, the following information is provided in this NOTICE OF		nd in accordance with Section 713.13 of the
a) Street (job) Address: 6/ony DRIVE, Lake City, FC	in lalling Meadou	S, 456 S.W. MODNING
General description of improvements: New Single Fam	My Duelling	
a) Name and address: Hugo Escalon & P.O. B.W. b) Name and address of fee simple titleholder (if other than owner)	280. Ford whool	. FC 32038
c) Interest in property 16046		
a) Name and address: EUPLINC (Hugo Exolumn	() Po. BOY 280	Ford Whap, FC.
b) Telephone No.: <u>386 288 8666</u>	Fax No. (Opt.)	3000 1800 886 9563
a) Name and address:		-
b) Amount of Bond;		
o) respirate 110	Fax Inst:200	0712024259 Date:10/30/2007 Time:10:4
a) Name and address:	12	DC,P.DeWitt Cason,Columbia County
b) Phone No ///	~	
. Identity of person within the State of Florida designated by owner upon wh	nom notices or other document	ments may be served:
a) Name and address: Hogo Esca lan & b) Telephone No.: 386 2888666	Fay No. (Ont.)	1800 8869563
b) reconcile ivo	гах но. (Орг.)	7800 88070 53
. In addition to himself, owner designates the following person to receive a	copy of the Lienor's Notice	e as provided in Section 713.13(l)(b),
lorida Statutes:		
a) Name and address: Hugo Escalan le b) Telephone No.: 386 2888666	Fax No. (Opt.)	1000 001 0077
b) Telephone No.:	Fax No. (Opt.)	7800 888 0087
Expiration date of Notice of Commencement (the expiration date is one y is specified):	ear from the date of rec	ording unless a different date
VARNING TO OWNER: ANY PAYMENTS MADE BY THE OWNER COMMENCEMENT ARE CONSIDERED IMPROPER PAYMENTS UT ATUTES, AND CAN RESULT IN YOUR PAYING TWICE FOR IM COMMENCEMENT MUST BE RECORDED AND POSTED ON THE COORDING FINANCING, CONSULT YOUR LENDER OR AN ATTO	NDER CHAPTER 713, 1 PROVEMENTS TO YO JOB SITE BEFORE TH	PART I, SECTION 713.13, FLORIDA OUR PROPERTY; A NOTICE OF E FIRST INSPECTION. IF YOU INTEN
OUR NOTICE OF COMMENCEMENT.	1 01	
TATE OF FLORIDA OUNTY OF COLUMBIA 10.	thread montre	8
Signatu	re of Owner or Owner's Au	uthorized Office/Director/Partner/Manager
	Lugo Escalar	1 de
Print N	ame	- (
ne foregoing instrument was acknowledged before me, a Florida Notary, this	<u> 30</u> day of <u>の</u>	ctober 2007 by:
Hugo Estelante 15 Owner	(t)	pe of authority, e.g. officer, trustee, attorne
ce) for EWOL INC.	(name of party of	on behalf of whom instrument was executed
.=,	(me or party	
ersonally Known OR Produced Identification Type	. Y	MARSHA B. WARD


AND—11. Verification pursuant to Section 92.525, Florida Statutes. Under penalties of perjury, I declare that I have read the foregoing and that the facts stated in it are true to the best of my knowledge and belief.

Notary Stamp or Seal:

EXPIRES: March 9, 2008
Bonded Thru Notary Public Underwriters

Lot 19 Rolling Meadows Pance # 15-45-16-03023-519 456 S.W. Morning Glary Se



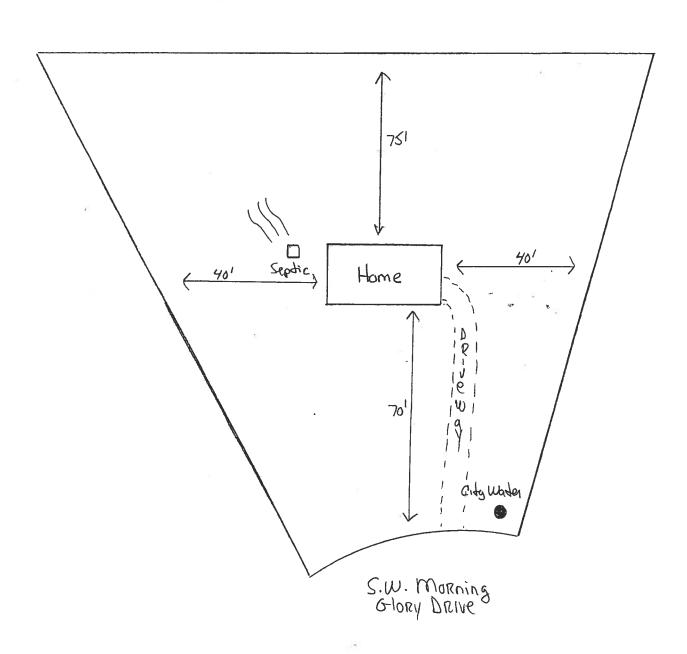

DEPARTMENT OF HEALTH
APPLICATION FOR ONSITE SEWAGE DISPOSAL SYSTEM CONSTRUCTION PERMITPROPRIES Permit Application Number 97.0815 N
A La Ballina A
PARTII-SITEPLAN PARTII-SITEPLAN PARTII-SITEPLAN
Scale: 1 inch = 50 feet.
αm 211
8m 211
2520Ph 45
1 25555Q N 102 6
224
WALLANT WIST WING DOWN
DEATH AC-C
MURNING- GLORY DR
((GLORY D'R
Notes.
NOTES.
ite Plan submitted by: MASTER CONTRACTO
Plan Approved Not Approved Date
y On S Land Cambia County Health Departs

ALL CHANGES MUST BE APPROVED BY THE COUNTY HEALTH DEPARTMENT

Let 19 Polling Meadows

Lot19 RM

ENGINEERING CONSULTANTS IN GEOTECHNICAL . ENVIRONMENTAL . CONSTRUCTION MATERIALS TESTING

November 29, 2007 Project No.063109.02G

Hugo Escalante EWPL, Inc. P. O. Box 280 Fort White, Florida 32038

Reference: Proposed Residence, Rolling Meadows, Lot 19

456 S. W. Morning Glory Drive, Lake City, Florida

Dear Mr. Escalante.

At your request, Geo-Tech, Inc. has performed an investigation and evaluation of the home site at Rolling Meadows, Lot 19 in Lake City, Florida. The purposes of our work were to evaluate the potential for flooding of the home to be located at the site and to provide recommendations for selecting a finished floor elevation. Foundations and stem walls for the residence had been constructed at the time of our investigation.

With reference to the benchmark set at the site by Donald Lee and Associates, the proposed finished floor elevation will be approximately 111.1 feet. This elevation places the finished floor approximately 3.8 feet higher than the centerline of the adjacent paved roadway and about 1 foot higher than the surface soils at the perimeter of the proposed residence. However, we understand this elevation is approximately 1 foot lower than the finished floor elevation specified by the subdivision plans.

Based upon U.S.G.S. topographic guadrangle maps of the area and areas to the south, flooding of this home site cannot occur. The topography is such that any buildup of water sufficient to constitute flooding would simultaneously require flooding of the southern half of Florida to an elevation of about 110 feet. We believe this will not occur.

Based upon our findings and evaluation, it is our opinion raising the finished floor elevation an additional foot will not be required to prevent flooding of this residence. We recommend you use the stem walls as currently constructed.

We appreciate the opportunity to be of service and look forward to a continued association. Please contact us if you have questions concerning this report.

11/30/07

FLORIDA DEPARTMENT OF STATE Division of Corporations

Home

Contact Us

E-Filing Services

Document Searches

Forms

Help

Previous on List Next on List

Return To List

No Events

No Name History

Entity Name Search

Detail by Entity Name

Florida Profit Corporation

EWPL, INC.

Filing Information

Document Number P02000080482

FEI Number

010737748

Date Filed

07/24/2002

State

FL

Status

ACTIVE

Principal Address

6210 S.W. CR 18

FORT WHITE FL 32038

Changed 01/23/2005

Mailing Address

P.O. BOX 280

FORT WHITE FL 32038

Changed 04/05/2004

Registered Agent Name & Address

ESCALANTE, HUGO

194 S.W. ROUND HOUSE COURT

FORT WHITE FL 32038

Address Changed: 01/15/2006

Officer/Director Detail

Name & Address

Title D

ESCALANTE, HUGO 194 S.W. ROUND HOUSE COURT FORT WHITE FL 32038

Annual Reports

Report Year Filed Date

2005 01/23/2005 2006 01/15/2006

2007 01/11/2007

Document Images

01/11/2007 -- ANNUAL REPORT

01/15/2006 - ANNUAL REPORT

04/05/2004 -- ANNUAL REPORT

Florida Department of State

Division of Corporations Public Access System Katherine Harris, Secretary of State

Electronic Filing Cover Sheet

Note: Please print this page and use it as a cover sheet. Type the fax audit number (shown below) on the top and bottom of all pages of the document.

(((H02000170934 2)))

Note: DO NOT hit the REFRESH/RELOAD button on your browser from this page. Doing so will generate another cover sheet.

To:

Division of Corporations

Fax Number

: (850)205-0381

From:

: EMPIRE CORPORATE KIT COMPANY Account Name

Account Number : 072450003255 Phone

: (305) 634-3694

Fax Number

: (305) 633-9696

FLORIDA PROFIT CORPORATION OR P.A.

ewpl, inc.

Certificate of Status	0
Certified Copy	1 1
Page Count	18 05
Estimated Charge	\$78.75

7/24/02 11:06 AN

1NF-S4-S00S 11:01

H02000170934

ARTICLES OF INCORPORATION

OF

EWPL INC.

ARTICLE I

The name of the corporation shall be: EWPL, INC.

ARTICLE II

The corporation shall be engaged in such activity of business permitted under the laws of the United States and of the State of Florida..

ARTICLE III

- 1. The maximum number of shares of stock which this corporation is authorized to have outstanding at any time shall be 1,000,000 shares of common stock having \$1.00 par value.
- 2. The capital stock may be paid for with property, labor or services, at a just valuation to be fixed by the incorporators, or by the directors at a meeting called for such purpose or ate the organization meeting.
- 3. Property, labor or services may also be purchased or paid for with the capital stock at a just valuation of said property, labor or services, to be fixed by the directors of the company.

ARTICLE IV

Except as otherwise provided by the law, the entire voting poser for the election of directors and all other purposes shall be vested exclusively in the holders of the outstanding common shares.

H02000170934

ARTICLE V

The existence of the corporation is perpetual.

ARTICLE VI

The street address of the initial registered office of this corporation is: 15433 SW 146 Street, Miami, Florida 33196. And the initial registered agent of this corporation at the above address is: Hugo Escalante.

ARTICLE VII

The business of the corporation shall be managed by a Board of Directors consisting of not less than one (1) or more than three (3) persons.

The Board of Directors shall meet each month at a time and date to be announced by the Board.

The Board of Directors assigns responsibility of the agency to the administrator, persons whom shall be named by the Board of Directors.

ARTICLE VIII

The names and street addresses of the members of the first Board of Directors who, unless provided by the Articles of Incorporation, or by the By-Laws, shall hold office for the first year of existence of the corporation, or until their successors are elected or appointed and have qualified, are as follows:

NAME

ADDRESS

Hugo Escalante

15433 SW 146 Street, Miami, Florida

ARTICLE IX

The name and street address of the party signing the Articles of Incorporation as subscribed is as follows:

NAME

ADDRESS

Hugo Escalante

15433 SW 146 Street, Miami, Florida

ARTICLE X

The principal address of the corporation is: 15433 SW 146 Street, Miami, Florida.

ARTICLE XI

The Board of Directors shall be elected at the annual meeting of the shareholders of the corporation by a majority vote of those shareholders attending said meeting in person or by Proxy.

ARTICLE XII

Quorum for any meeting shall be two thirds attendance and those persons eligible to vote as same. Fiscal year for the corporation shall be January 1 through December 31.

IN WITNESS WHEREOF, the undersigned incorporator has executed these Articles of Incorporation this 19th day of December, 2001.

H02000170934

CERTIFICATE OF DESIGNATION

REGISTERED AGENT/REGISTERED OFFICE

PROCESS FOR THE ABOVE STATED CORPORATION AT THE PLACE DESIGNATED IN THIS CERTIFICATE, I HEREBY ACCEPT THE APPOINTMENT AS REGISTERED AGENT AND AGREE TO ACT IN THIS CAPACITY. I FURTHER AGREE TO COMPLY WITH THE PROVISIONS OF ALL STATUTES RELATING TO THE PROPER AND COMPLETE PERFORMANCE OF MY DUTIES, AND I AM FAMILIAR WITH AND ACCEPT THE OBLIGATIONS OF MY POSITION AS REGISTERED AGENT.

Theo Escalante

Date: 7-/8-2002

GAFRANK entities of los. upd

H02000170934

Project Name:

Address:

EWPL INC

Permitting Office: Columbia Co.

FLORIDA ENERGY EFFICIENCY CODE FOR BUILDING CONSTRUCTION

Florida Department of Community Affairs
Residential Whole Building Performance Method A

Builder:

	ke City, FL 32038- ron & Glenda Wrubel rth		mit Number: 26 sdiction Number: 221	4/2	
a. U-factor:	mily Single family i-family 1 3 Yes ft²) 1745 ft² abel reqd. by 13-104.4.5 if not default) Description Area EFAULT) 7a. (Dble Default) 248.0 ft² ULT) 7b. (Clear) 248.0 ft² ulation R=0.0, 194.0(p) ft R=13.0, 197.0 ft² R=13.0, 1554.0 ft²	15. HVAC credits (CF-Ceiling fa HF-Whole ho	ms Pump tems tance credits overy, Solar ted heat pump) s an, CV-Cross ventilation, ouse fan, nable Thermostat, cone cooling,	Cap: 36.0 kBtu/hr SEER: 13.00	
Glass/Flo	or Area: U ib	It points: 25918 e points: 28250	PASS		

I hereby certify that the plans and specifications covered by this calculation are in compliance with the Florida Energy

WRUBEL RESIDENCE

Lot: 19, Sub: Rolling Meadows, Plat:

Code.

PREPARED BY:

DATE: 10-15-07

I hereby certify that this building, as designed, is in compliance with the Florida Energy Code.

OWNER/AGENT: ______

Review of the plans and specifications covered by this calculation indicates compliance with the Florida Energy Code.

Before construction is completed this building will be inspected for compliance with Section 553.908 Florida Statutes.

COD WE THE STATE OF THE STATE O

BUILDING OFFICIAL: _

DATE:

SUMMER CALCULATIONS

Residential Whole Building Performance Method A - Details

ADDRESS: Lot: 19, Sub: Rolling Meadows, Plat: , Lake City, FL, 32038- PERMIT #:

BASE		AS-	BUILT			
GLASS TYPES .18 X Conditioned X BSPM = Points Floor Area	r	Overhang Irnt Len	Hgt Area	X SPM X	SOF	= Points
.18 1745.0 20.04 6294.6	Double, Clear	SE 1.5	7.5 42.0	42.75	0.93	1674.8
			10.0 13.3		0.51	292.8
	Double, Clear	SE 9.0	4.0 9.3	42.75	0.40	157.9
	· ·	SE 1.5	5.5 17.5	42.75	0.86	644.2
Ì	· ·	SW 1.5	5.5 30.0		0.86	1039.8
		VW 1.5	5.5 17.5		0.91	414.4
	Double, Clear	N 1.5	6.5 16.0		0.95	291.1
	•	VW 1.5	6.5 36.0		0.94	876.2
1		W 1.5 NE 1.5	6.5 16.0 6.5 16.0		0.93	571.5
İ		W 1.5	5.5 30.0		0.93	441.3 710.4
		NE 1.5	5.5 20.0		0.91	535.3
		NE 1.5	5.0 16.0		0.89	419.2
	As-Built Total:		279.7			8068.7
WALL TYPES Area X BSPM = Points	Туре	R-	Value Ar	ea X SPI	vi =	Points
Adjacent 197.0 0.70 137.9	Frame, Wood, Adjacent		13.0 197.0	0.60		118.2
Exterior 1554.0 1.70 2641.8	Frame, Wood, Exterior	•	13.0 1554.0	1.50		2331.0
Base Total: 1751.0 2779.7	As-Built Total:		1751.0			2449.2
DOOR TYPES Area X BSPM = Points	Туре		Are	ea X SPI	1 =	Points
Adjacent 20.0 2.40 48.0	Exterior Wood		40.0	6.10		244.0
Exterior 120.0 6.10 732.0	Adjacent Wood		20.0	2.40		48.0
	Exterior Insulated		80.0	4.10		328.0
Base Total: 140.0 780.0	As-Built Total:		140.0			620.0
CEILING TYPES Area X BSPM = Points	Туре	R-Value	e Area X	SPM X S	= MC	Points
Under Attic 1745.0 1.73 3018.9	Under Attic	3	30.0 1745.0	1.73 X 1.00		3018.9
Base Total: 1745.0 3018.9	As-Built Total:		1745.0			3018.9
FLOOR TYPES Area X BSPM = Points	Туре	R-\	/alue Are	a X SPN	1 =	Points
Slab 194.0(p) -37.0 -7178.0 Raised 0.0 0.00 0.0	Slab-On-Grade Edge Insulation		0.0 194.0(p	-41.20		-7992.8
Base Total: -7178.0	As-Built Total:		194.0			-7992.8

SUMMER CALCULATIONS

Residential Whole Building Performance Method A - Details

ADDRESS: Lot: 19, Sub: Rolling Meadows, Plat: , Lake City, FL, 32038- PERMIT #:

BASE	AS-BUILT						
INFILTRATION Area X BSPM = Poin	Area X SPM = Points						
1745.0 10.21 17816	.4 1745.0 10.21 17816.4						
Summer Base Points: 23511.6	Summer As-Built Points: 23980.4						
Total Summer X System = Cooling Points Multiplier Points	Total X Cap X Duct X System X Credit = Cooling Component Ratio Multiplier Multiplier Multiplier Points (System - Points) (DM x DSM x AHU)						
23511.6 0.4266 10030	(sys 1: Central Unit 36000 btuh ,SEER/EFF(13.0) Ducts:Unc(S),Unc(R),Int(AH),R6.0(INS) 23980						

WINTER CALCULATIONS

Residential Whole Building Performance Method A - Details

ADDRESS: Lot: 19, Sub: Rolling Meadows, Plat: , Lake City, FL, 32038-

PERMIT #:

BAS	Ε		AS-BUILT								
GLASS TYPES .18 X Conditioned X Floor Area	BWPM =	Points	Type/SC	Ove Ornt	erhang Len	Hgt	Area X	WF	м х	WO	F = Points
.18 1745.0	12.74	4001.6	Double, Clear	SE	1.5	7.5	42.0	14.	71	1.06	653.8
			Double, Clear	SE	9.0	10.0	13.3	14.	71	1.84	361.3
			Double, Clear	SE	9.0	4.0	9.3	14.		2.53	347.9
			Double, Clear	SE	1.5	5.5	17.5	14.		1.11	286.7
			Double, Clear	SW	1.5	5.5	30.0	16.		1.07	538.4
			Double, Clear	NW	1.5	5.5	17.5	24.3		1.00	426.9
			Double, Clear	N NW	1.5 1.5	6.5 6.5	16.0	24.5 24.5		1.00	394.0 876.8
			Double, Clear Double, Clear	W	1.5 1.5	6.5	36.0 16.0	20.1		1.00	338.2
			Double, Clear	NE	1.5	6.5	16.0	23.		1.02	379.0
			Double, Clear	NW	1.5	5.5	30.0	24.3		1.00	731.9
			Double, Clear	NE	1.5	5.5	20.0	23.		1.01	475.1
			Double, Clear	NE	1.5	5.0	16.0	23.	57	1.01	380.9
			As-Built Total:				279.7				6190.8
WALL TYPES Area	X BWPM	= Points	Туре		R-	Value	e Area	аΧ	WPN	1 =	Points
Adjacent 197.0	3.60	709.2	Frame, Wood, Adjacent			13.0	197.0		3.30		650.1
Exterior 1554.0	3.70	5749.8	Frame, Wood, Exterior			13.0	1554.0		3.40		5283.6
Base Total: 1751.	0	6459.0	As-Built Total:				1751.0				5933.7
DOOR TYPES Area	X BWPM	= Points	Туре				Area	Х	WPN	1 =	Points
Adjacent 20.0	11.50	230.0	Exterior Wood				40.0		12.30		492.0
Exterior 120.0	12.30	1476.0	Adjacent Wood				20.0		11.50		230.0
			Exterior Insulated				80.0		8.40		672.0
Base Total: 140.)	1706.0	As-Built Total:				140.0				1394.0
CEILING TYPES Area	X BWPM	= Points	Туре	R	l-Value	Ar	ea X V	VPM.	x wc	CM =	Points
Under Attic 1745.0	2.05	3577.3	Under Attic			30.0	1745.0	2.05 >	(1.00		3577.3
Base Total: 1745.)	3577.3	As-Built Total:				1745.0				3577.3
FLOOR TYPES Area	X BWPM	= Points	Туре		R-'	Value	Area	ιX	WPN	1 =	Points
Slab 194.0(p) Raised 0.0	8.9 0.00	1726.6 0.0	Slab-On-Grade Edge Insulati	on		0.0	194.0(p		18.80		3647.2
Base Total:		1726.6	As-Built Total:				194.0				3647.2

WINTER CALCULATIONS

Residential Whole Building Performance Method A - Details

ADDRESS: Lot: 19, Sub: Rolling Meadows, Plat: , Lake City, FL, 32038- PERMIT #:

BASE	AS-BUILT
INFILTRATION Area X BWPM = Points	Area X WPM = Points
1745.0 -0.59 -1029.	1745.0 -0.59 -1029.5
Winter Base Points: 16440.9	Winter As-Built Points: 19713.4
Total Winter X System = Heating Points Multiplier Points	Total X Cap X Duct X System X Credit = Heating Component Ratio Multiplier Multiplier Multiplier Points (System - Points) (DM x DSM x AHU)
16440.9 0.6274 10315.0	(sys 1: Electric Heat Pump 36000 btuh ,EFF(7.2) Ducts:Unc(S),Unc(R),Int(AH),R6.0 19713.4 1.000 (1.069 x 1.169 x 0.93) 0.474 1.000 10850.7 19713.4 1.00 1.162 0.474 1.000 10850.7

WATER HEATING & CODE COMPLIANCE STATUS

Residential Whole Building Performance Method A - Details

ADDRESS: Lot: 19, Sub: Rolling Meadows, Plat: , Lake City, FL, 32038- PERMIT #:

BASE					AS-BUILT								
WATER HEA Number of Bedrooms	X X	M ultiplier	=	Total	Tank Volume	EF	Number of Bedrooms	x	Tank X Ratio	Multiplier	X Credit Multiplie		
3		2635.00		7905.0	50.0	0.92	3		1.00	2635.00	1.00	7905.0	
					As-Built To	otal:						7905.0	

CODE COMPLIANCE STATUS													
		BAS	SE							AS	BUILT		
Cooling Points	+	Heating Points	+	Hot Water Points	=	Total Points	Cooling Points	+	Heating Points	+	Hot Water Points	=	Total Points
10030		10315		7905		28250	7163		10851		7905		25918

PASS



Code Compliance Checklist

Residential Whole Building Performance Method A - Details

ADDRESS: Lot: 19, Sub: Rolling Meadows, Plat: , Lake City, FL, 32038- PERMIT #:

6A-21 INFILTRATION REDUCTION COMPLIANCE CHECKLIST

COMPONENTS	SECTION	REQUIREMENTS FOR EACH PRACTICE	CHECK
Exterior Windows & Doors	606.1.ABC.1.1	Maximum:.3 cfm/sq.ft. window area; .5 cfm/sq.ft. door area.	
Exterior & Adjacent Walls	606.1.ABC.1.2.1	Caulk, gasket, weatherstrip or seal between: windows/doors & frames, surrounding wall;	
		foundation & wall sole or sill plate; joints between exterior wall panels at corners; utility	
		penetrations; between wall panels & top/bottom plates; between walls and floor.	
		EXCEPTION: Frame walls where a continuous infiltration barrier is installed that extends	
		from, and is sealed to, the foundation to the top plate.	
Floors	606.1.ABC.1.2.2	Penetrations/openings >1/8" sealed unless backed by truss or joint members.	
		EXCEPTION: Frame floors where a continuous infiltration barrier is installed that is sealed	
		to the perimeter, penetrations and seams.	Í
Ceilings	606.1.ABC.1.2.3	Between walls & ceilings; penetrations of ceiling plane of top floor; around shafts, chases,	
		soffits, chimneys, cabinets sealed to continuous air barrier; gaps in gyp board & top plate;	
		attic access. EXCEPTION: Frame ceilings where a continuous infiltration barrier is	
		installed that is sealed at the perimeter, at penetrations and seams.	
Recessed Lighting Fixtures	606.1.ABC.1.2.4	Type IC rated with no penetrations, sealed; or Type IC or non-IC rated, installed inside a	
		sealed box with 1/2" clearance & 3" from insulation; or Type IC rated with < 2.0 cfm from	
		conditioned space, tested.	- 1
Multi-story Houses	606.1.ABC.1.2.5	Air barrier on perimeter of floor cavity between floors.	
Additional Infiltration reqts	606.1.ABC.1.3	Exhaust fans vented to outdoors, dampers; combustion space heaters comply with NFPA,	
		have combustion air.	i

6A-22 OTHER PRESCRIPTIVE MEASURES (must be met or exceeded by all residences.)

COMPONENTS	SECTION	REQUIREMENTS	CHECK
Water Heaters	612.1	Comply with efficiency requirements in Table 612.1.ABC.3.2. Switch or clearly marked cir	
		breaker (electric) or cutoff (gas) must be provided. External or built-in heat trap required.	
Swimming Pools & Spas	612.1	Spas & heated pools must have covers (except solar heated). Non-commercial pools	
		must have a pump timer. Gas spa & pool heaters must have a minimum thermal	
		efficiency of 78%.	
Shower heads	612.1	Water flow must be restricted to no more than 2.5 gallons per minute at 80 PSIG.	
Air Distribution Systems	610.1	All ducts, fittings, mechanical equipment and plenum chambers shall be mechanically	
		attached, sealed, insulated, and installed in accordance with the criteria of Section 610.	
		Ducts in unconditioned attics: R-6 min. insulation.	
HVAC Controls	607.1	Separate readily accessible manual or automatic thermostat for each system.	
Insulation	604.1, 602.1	Ceilings-Min. R-19. Common walls-Frame R-11 or CBS R-3 both sides.	
		Common ceiling & floors R-11.	

ENERGY PERFORMANCE LEVEL (EPL) DISPLAY CARD

ESTIMATED ENERGY PERFORMANCE SCORE* = 84.0

The higher the score, the more efficient the home.

Myron & Glenda Wrubel, Lot: 19, Sub: Rolling Meadows, Plat: , Lake City, FL, 32038-

1. 2. 3.	New construction or existing Single family or multi-family Number of units, if multi-family	New Single family	a	Cooling systems Central Unit	Cap: 36.0 kBtu/hr SEER: 13.00	_
4. 5. 6. 7.	Number of Bedrooms Is this a worst case? Conditioned floor area (ft²) Glass type¹ and area: (Label reqd.	3 Yes 1745 ft ² by 13-104 4.5 if not default)	_	o. N/A o. N/A		_
a.	U-factor: (or Single or Double DEFAULT) SHGC:	Description Area		Heating systems Electric Heat Pump	Cap: 36.0 kBtu/hr HSPF: 7.20	
	(or Clear or Tint DEFAULT) Floor types Slab-On-Grade Edge Insulation	7b. (Clear) 248.0 ft ² R=0.0, 194.0(p) ft		. N/A . N/A		_
b. c.	N/A N/A	n-v.u, 134.u(p) ii		Hot water systems		_
a. b.	Wall types Frame, Wood, Adjacent Frame, Wood, Exterior N/A	R=13.0, 197.0 ft ² R=13.0, 1554.0 ft ²	_	. Electric Resistance	Cap: 50.0 gallons EF: 0.92	
e.	N/A N/A Ceiling types		c	Conservation credits (HR-Heat recovery, Solar DHP-Dedicated heat pump)		
a. b. c.	Under Attic N/A N/A	R=30.0, 1745.0 ft ²	15. 	HVAC credits (CF-Ceiling fan, CV-Cross ventilation, HF-Whole house fan,		
a.	Ducts Sup: Unc. Ret: Unc. AH: Interior N/A	Sup. R=6.0, 115.0 ft	_ _	PT-Programmable Thermostat, MZ-C-Multizone cooling, MZ-H-Multizone heating)		
Cons in th	tify that this home has complie struction through the above end is home before final inspection	ergy saving features which . Otherwise, a new EPL I	n will be in	stalled (or exceeded)	OF THE STATE OF	
	d on installed Code compliant der Signature:		Date:			
Addı	ress of New Home:		City/FL Z	ip:	GOD WE TRUST	Ø

*NOTE: The home's estimated energy performance score is only available through the FLA/RES computer program. This is <u>not</u> a Building Energy Rating. If your score is 80 or greater (or 86 for a US EPA/DOE EnergyStar^{IM}designation), your home may qualify for energy efficiency mortgage (EEM) incentives if you obtain a Florida Energy Gauge Rating. Contact the Energy Gauge Hotline at 321/638-1492 or see the Energy Gauge web site at www.fsec.ucf.edu for information and a list of certified Raters. For information about Florida's Energy Efficiency Code For Building Construction, contact the Department of Community Affairs at 850/487-1824.

1 Predominant glass type. For actual glass type and areas, see Summer & Winter Glass output on pages 2&4. EnergyGauge® (Version: FLRCSB v4.0)



ENGINEERING CONSULTANTS IN GEOTECHNICAL • ENVIRONMENTAL • CONSTRUCTION MATERIALS TESTING

April 9, 2008 Project No.063109.02G

Hugo Escalante EWPL. Inc. P. O. Box 280 Fort White. Florida 32038

Reference: Existing Residence, Rolling Meadows, Lot 19

456 S. W. Morning Glory Drive

Lake City, Florida

Dear Mr. Escalante,

At your request, Geo-Tech, Inc. has performed an investigation of the home at Rolling Meadows, Lot 19 in Lake City, Florida. The purposes of our work were to determine the finished floor elevation.

With reference to the benchmark set at the site by Donald Lee and Associates (elevation 107.71) and field measurements, the finished floor elevation has been determined to be approximately 111.15 feet.

We appreciate the opportunity to be of service and look forward to a continued association. Please contact us if you have questions concerning this report.

Respectfully submitted,

Geo-Tech (Inc.

John C. Doman, Jr., Ph.D., P.E.

Geotechnical Engineer

Florida Registration No. 52612

Residential System Sizing Calculation

Summary

Myron & Glenda Wrubel Lake City, FL 32038Project Title: WRUBEL RESIDENCE

Code Only Professional Version Climate: North


10/15/2007

Location for weather data: Gainesville - Defaults: Latitude(29) Temp Range(M)									
Humidity data: Interior RH (50%) Outdoor wet bulb (77F) Humidity difference(51gr.)									
Winter design temperature	31	F	Summer design temperature	93	F				
Winter setpoint	70	F	Summer setpoint	75	F				
Winter temperature difference	39	F	Summer temperature difference	18	F				
Total heating load calculation	30255	Btuh	Total cooling load calculation	31738	Btuh				
Submitted heating capacity	36000	Btuh	Submitted cooling capacity	36000	Btuh				
Submitted as % of calculated	119.0	%	Submitted as % of calculated	113.4	%				

WINTER CALCULATIONS

Winter Heating Load (for 1745 sqft)


Load component			Load	
Window total	280	sqft	7915	Btuh
Wall total	1751	sqft	5133	Btuh
Door total	140	sqft	2368	Btuh
Ceiling total	1745	sqft	2269	Btuh
Floor total	194	ft	6130	Btuh
Infiltration	117	cfm	5001	Btuh
Subtotal			28815	Btuh
Duct loss			1441	Btuh
TOTAL HEAT LOSS			30255	Btuh

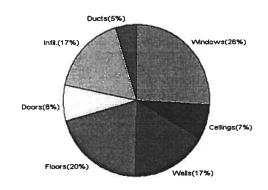

SUMMER CALCULATIONS

Summer Cooling Load (for 1745 sqft)

Load component			Load	
Window total	280	sqft	10767	Btuh
Wall total	1751	sqft	2909	Btuh
Door total	140	sqft	1410	Btuh
Ceiling total	1745	sqft	2478	Btuh
Floor total			0	Btuh
Infiltration	102	cfm	2020	Btuh
Internal gain			4800	Btuh
Subtotal(sensible)			24383	Btuh
Duct gain			2438	Btuh
Total sensible gain			26821	Btuh
Latent gain(infiltration)			3537	Btuh
Latent gain(internal)			1380	Btuh
Total latent gain			4917	Btuh
TOTAL HEAT GAIN			31738	Btuh

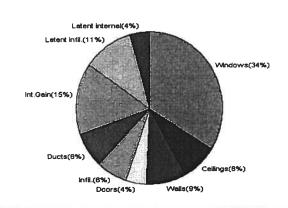

EnergyGauge® System Sizing based on ACCA Manual J.

PREPARED BY:

DATE: 10-15-07

System Sizing Calculations - Winter

Residential Load - Component Details Project Title:

Myron & Glenda Wrubel

Lake City, FL 32038-

WRUBEL RESIDENCE

Code Only Professional Version

Climate: North

Reference City: Gainesville (Defaults) Winter Temperature Difference: 39.0 F

10/15/2007

Window	Panes/SHGC/Frame/U	Orientation	n Area X	HTM=	Load
1	2, Clear, Metal, DEF	N	42.0	28.3	1189 Btuh
2	2, Clear, Metal, DEF	N	13.3	28.3	377 Btuh
3	2, Clear, Metal, DEF	N	9.3	28.3	264 Btuh
4	2, Clear, Metal, DEF	N	17.5	28.3	495 Btuh
5	2, Clear, Metal, DEF	E	30.0	28.3	849 Btuh
6	2, Clear, Metal, DEF	S	17.5	28.3	495 Btuh
7	2, Clear, Metal, DEF	SW	16.0	28.3	453 Btuh
8	2, Clear, Metal, DEF	S	36.0	28.3	1019 Btuh
9	2, Clear, Metal, DEF	SE	16.0	28.3	453 Btuh
10	2, Clear, Metal, DEF	W	16.0	28.3	453 Btuh
11	2, Clear, Metal, DEF	S	30.0	28.3	849 Btuh
12	2, Clear, Metal, DEF	W	20.0	28.3	566 Btuh
13	2, Clear, Metal, DEF	W	16.0	28.3	453 Btuh
	Window Total		280		7915 Btuh
Walls	Type	R-Value	Area X	HTM=	Load
1	Frame - Adjacent	13.0	197	1.6	315 Btuh
2	Frame - Exterior	13.0	1554	3.1	4817 Btuh
-	Tarric - Exterior	10.0	1004	0.1	4017 Bluil
	Wall Total		1751		5133 Btuh
Doors	Туре		Area X	HTM=	Load
1	Wood - Exter		40	17.9	718 Btuh
2	Wood - Adjac		20	9.2	184 Btuh
3	Insulated - Exter		80	18.3	1466 Btuh
	Door Total		440		000000
Callings	Door Total	R-Value	140	HTM=	2368Btuh
Ceilings	Type Under Attic	30.0	Area X		Load
1	Under Attic	30.0	1745	1.3	2268 Btuh
	Ceiling Total		1745		2269Btuh
Floors	Туре	R-Value	Size X	HTM=	Load
1	Slab-On-Grade Edge Insul	0	194.0 ft(p)	31.6	6130 Btuh
	Floor Total		194		6130 Btuh
Infiltration	Туре	ACH X	Building Volume	CFM=	Load
	Natural	0.40	17450(sqft)	117	5001 Btuh
	Mechanical			0	0 Btuh
	Infiltration Total			117	5001 Btuh

	Subtotal	28815 Btuh
Totals for Heating	Duct Loss(using duct multiplier of 0.05)	1441 Btuh
	Total Btuh Loss	30255 Btuh

Manual J Winter Calculations

Residential Load - Component Details (continued)

Myron & Glenda Wrubel

Project Title: WRUBEL RESIDENCE

Code Only Professional Version

Lake City, FL 32038-

Climate: North

10/15/2007

Key: Window types (SHGC - Shading coefficient of glass as SHGC numerical value or as clear or tint)

(Frame types - metal, wood or insulated metal)

(U - Window U-Factor or 'DEF' for default)

(HTM - ManualJ Heat Transfer Multiplier)

Key: Floor size (perimeter(p) for slab-on-grade or area for all other floor types)

System Sizing Calculations - Summer

Residential Load - Component Details Project Title:

Myron & Glenda Wrubel

Reference City: Gainesville (Defaults)

WRUBEL RESIDENCE

Lake City, FL 32038-

Summer Temperature Difference: 18.0 F

Code Only Professional Version Climate: North

10/15/2007

	Туре	Over	hang	Win	dow Are	a(soft)	Н	ITM	Load	
Window	Panes/SHGC/U/InSh/ExSh Ornt	Len	Hgt	Gross		Unshaded		Unshaded		
1	2, Clear, DEF, N, N N	1.5	7.5	42.0	0.0	42.0	22	22	924	Btuh
2	2, Clear, DEF, N, N N	9	10	13.3	0.0	13.3	22	22	293	Btuh
3	2, Clear, DEF, N, N N	9	4	9.3	0.0	9.3	22	22	205	Btuh
4	2, Clear, DEF, N, N N	1.5	5.5	17.5	0.0	17.5	22	22	385	Btuh
5	2, Clear, DEF, N, N E	1.5	5.5	30.0	2.2	27.8	22	72	2048	Btuh
6	2, Clear, DEF, N, N S	1.5	5.5	17.5	17.5	0.0	22	37	385	
7	2, Clear, DEF, N, N SW	1.5	6.5	16.0	5.4	10.6	22	62	776	Btuh
8	2, Clear, DEF, N, N S	1.5	6.5	36.0	36.0	0.0	22	37	792	Btuh
9	2, Clear, DEF, N, N SE	1.5	6.5	16.0	5.4	10.6	22	62	776	Btuh
10	2, Clear, DEF, N, N W	1.5	6.5	16.0	2.0	14.0	22	72	1053	Btuh
11	2, Clear, DEF, N, N S	1.5	5.5	30.0	30.0	0.0	22	37	660	Btuh
12	2, Clear, DEF, N, N W	1.5	5.5	20.0	1.5	18.5	22	72	1366	Btuh
13	2, Clear, DEF, N, N W	1.5	5	16.0	1.0	15.0	22	72	1103	Btuh
	Window Total			280					10767	Btuh
Walls	Туре	R-	Value		-	Area		HTM	Load	
1	Frame - Adjacent		13.0		•	197.0		1.0	205	Btuh
2	Frame - Exterior		13.0		1	554.0		1.7	2704	Btuh
	Wall Total				17	751.0			2909	Btuh
Doors	Туре					Area		HTM	Load	
1	Wood - Exter					40.0		10.0	399	Btuh
2	Wood - Adjac					20.0		10.0	200	Btuh
3	Insulated - Exter					80.0		10.1	811	Btuh
	Door Total				1	40.0			1410	Btuh
Ceilings	Type/Color	R-\	/alue		-	Area		HTM	Load	
1	Under Attic/Dark		30.0		1	745.0		1.4	2478	Btuh
	Ceiling Total				17	745.0		:	2478	Btuh
Floors	Type	R-\	/alue			Size		НТМ	Load	Juil
1	Slab-On-Grade Edge Insulation	• • •	0.0			194.0 ft(p)		0.0	0	Btuh
'			3.0					0.0		-,uii
	Floor Total				1	94.0			0	Btuh
Infiltration	Туре	Α	CH		Vo	lume		CFM=	Load	
	Natural		0.35		1	7450		102.0	2020	Btuh
	Mechanical							0	0	Btuh
	Infiltration Total							102	2020	

Internal	Occupants		/occupa	nt	Appliance	Load	
gain	6	Χ	300	+	3000	4800	Btuh

Manual J Summer Calculations

Residential Load - Component Details (continued)

Vrubel Project Title:

Cod

Myron & Glenda Wrubel

Lake City, FL 32038-

WRUBEL RESIDENCE

Code Only **Professional Version**

Climate: North

10/15/2007

	Subtotal	24383	Btuh
	Duct gain(using duct multiplier of 0.10)	2438	Btuh
	Total sensible gain	26821	Btuh
Totals for Cooling	Latent infiltration gain (for 51 gr. humidity difference)	3537	Btuh
	Latent occupant gain (6 people @ 230 Btuh per person)	1380	Btuh
	Latent other gain	0	Btuh
	TOTAL GAIN	31738	Btuh


Key: Window types (SHGC - Shading coefficient of glass as SHGC numerical value or as clear or tint)
(U - Window U-Factor or 'DEF' for default)
(InSh - Interior shading device: none(N), Blinds/Daperies(B) or Roller Shades(R))
(ExSh - Exterior shading device: none(N) or numerical value)
(Ornt - compass orientation)

X Glazed Inswing Unit



WOOD-EDGE STEEL DOORS

APPROVED ARRANGEMENT:



Mote: Units of other sizes are covered by this report as long as the panel used does not exceed 30" x 5"9".

Single Door Madrata unt ses « FO' » FF

+50.5/-50.5

proper wells palean speaks throubold doubt is stad.

Large Missile Lapan Rasidane

Hurricane protective system (shutters) is REQUIRED.

annut mentan property and Impact mobiled relationship let a specific including during and geographic immalan in delevated by ASCS 7-extend close of local building make apacky the action included.

MINIMUM ASSEMBLY DETAIL:

Compliance requires that minimum assembly details have been followed — see MAD-WL-MA0001-02 and MAD-WL-MA0041-02.

MINIMUM INSTALLATION DETAIL:

. Compliance requires that minimum installation details have been followed - see MID-WI-MACCO1-02.

APPROVED DOOR STYLES: 1/4 GLASS:











1/2 GLARS:

















the party of the day and the state of the party of the state of the st

Entergy Systems Systems

stern 15, mag due colonies propose el product improventant imples specifications, design and produ destination to phone unique tentos.



X Glazed Inswing Unit

COP-WI FII4141-02

WOOD-EDGE STEEL DOORS

APPROVED DOOR STYLES: 1/4 GLA38;



















CERTIFIED TEST REPORTS:

NCTL 210-1897-7, 8, 9

Certifying Engineer and License Number: Barry D. Portney, R.S. / 16258.

Unit Tested in Accordance with Mami-Dade SCCO PA202.

Door panels constructed from 25-gauge 0.017" thick steel sidns. Both stiles constructed from wood. Top and ralls constructed of 0.032" steel. Bottom and ralls constructed of 0.032" steel. interior cavity of slab filled with rigid polyurathans fearn core. Slab glazed with insulated glaze mounted in a rigid plastic lip lite surround.

Frame constructed of wood with an extruded aluminum threshold.

Product compliance labeling:

COMPANY NAME CITY STATE

To the best of my knowledge and shifty the above side-hissed existing door unit conforms to the requirements of the 2003 Florida Suliding Code, Chapter 17 (Structural Tests and Inspections).


State of Florida, Professional Engineer Kurt Batthezor, P.E. - License Number 68533





MAD-MI-MA0001-02


INSWING UNIT WITH SINGLE DOOR

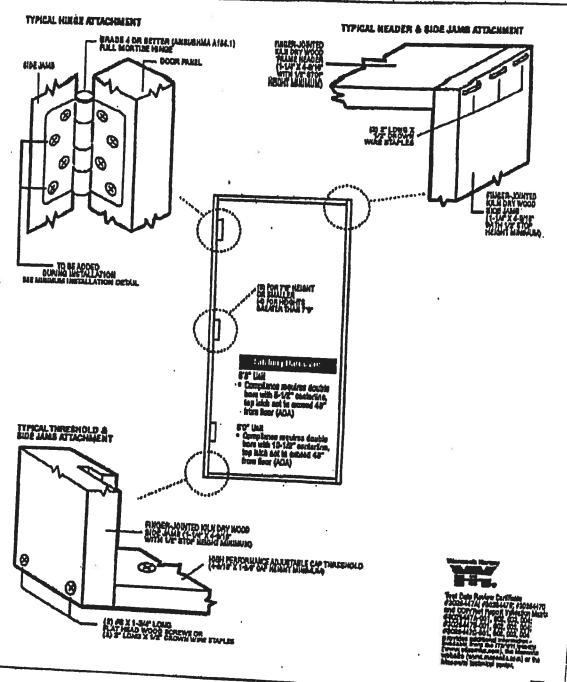



Catabar 14, 2002 for realmost propose of product representant regions equalibration should not product inter-colored by Green's solvent and Masonite.


A HIVIAD-WIL-WIAGD41-02

GLASS INSERT IN DOOR OR SIDELITE PANEL

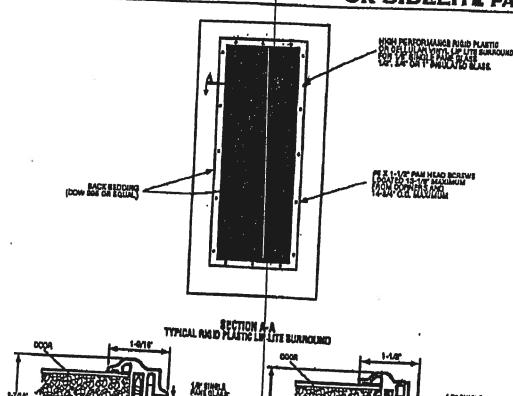





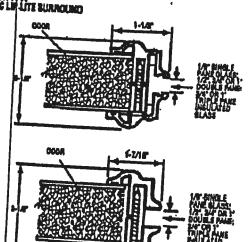

"Gizze lasers to be sub-listed by Intertel: Testing Services/ETL Service or approved validation service.




THE CASE REPORT THE PROPERTY OF THE PARTY OF

-\$100 17, 2002 Out testing propose of product incommend states aparticulated despited product dead angles to though ordinal meteo.



3/33829

SINGLE DOOR

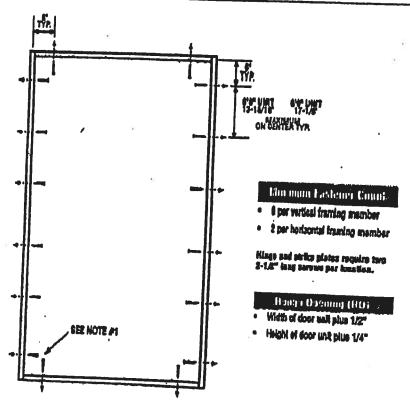

Latching Hardware:


- Compliance requires that GRADE 8 or better (AMSUBHMA A158.2) cylindrical and deadlock hardware be installed.
- UNITS COVERED BY SOP DOCUMENT GRASS*, 8285*, 8261*, 8261* or 8256
 Compliance Notices that 6" GRADE 1 (ANSI/SHMA A158.18) surface botts be installed on latch side of active door panel (1) at top *Seled on required Design Pressure — see COP sheet for details.

Notes:

- Aschor calculations have been carried out with the levest (less) fastancy rating from the different fastaners being considered for use. Jamb and head fastaners analyzed for this unit include #6 and #10 wood screws a 2/16" Tapcons. Threshold fastaners analyzed for this unit include #8 and #10 wood screws, 2/16" Tapcons, or Liquid Natio Euliders Choice 400 (or equal structural adhesive).
- 2. The wood sorrer single shear design values come from Table 11.2A of ANGUAF & PA NOS for southern plan fumber with a side enumber Sidkasse of 1-1A" and achievement of minimum embedment. The 1/16" Tapcon single shear design values come from the ITW and ELCO Dade Country embedment. 3. Wood busits by others, must be anchored properly to transfer loads to the structure.

Masonite.

SINGLE DOOR

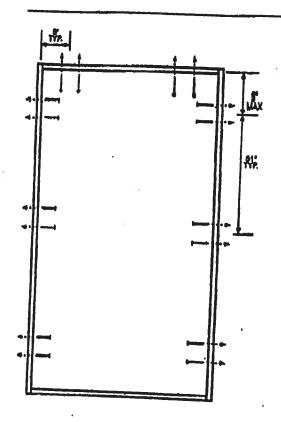

Minimum Fasteriar Count

- \$ per yerrical framing member for 70" height and smaller
- 8 per vertical framing amember for heights greater than 7'0"
- 4 per kerizontal framing mamber

illage and strike pixtue require two 2-1,2" leng ourses per location.

· Raugh Onening (BO)

- Width of door unit plus 1/2"
- " Height of door unit plus 1/4"



Laiching Hardware:

- . Compliance requires that GRADE 3 or better (ANSVEHIMA A1582) cylindrical and desclock hardware be installed.
- UNITS COVERED BY COP DOCUMENT COLOR, \$288", \$241", \$248, \$201" or \$258
 Compliance requires that 8" GRADE 1 (ANSUSHMA A156.18) surface bolts be installed on total alde of active close panel (1) at top each (1) at betterm.

*Based on inquired Design Pressure — see COP object for debals.

- 1. Another calculations have been certied out with the fastener rating from the different feateners being committeed for use. Jamp and head fasteners entitized for this unit include 10d common neits. Threshold fasteners entitized for this unit legiple Liquid Neits Builders Choice 400 (or equal
- 2. The bolimon nell pingle shear design values come from ANSI/AF & PA NDS for southern pine lumber with a aids member thickness of 1-1/4" and achievement of minimum embedment of 1-1/4". 3. Wood bucks by others, must be anchored properly to transfer leads to the structure.




XX Glazed Outswing Unit



Wood-edge Steel Doors

APPROVED ARRANGEMENT:



Nata: Mains of other sizes are covered by this report as long as the panels used do not exceed 3"0" x 6'8".

Double Door

Dealga Pressure +50.5/-50.5

Large Missile Impact Resistance

Hurricane protective system (shutters) is REQUIRED.

MINIMUM ASSEMBLY DETAIL:

Compliance requires that minimum essembly details have been followed - see MAD-WL-MA0012-02 and MAD-WL-MA0041-02.

MINIMUM INSTALLATION DETAIL:

Compliance requires that minimum installation details have been followed - see MID-WL-MA0002-02.

APPROVED DOOR STYLES: 1/4 CLASS:













1/2 GLASS:





















Glazed Outswing Unit

·· COP-IVI-FN4162-02

WOOD-EDGE STEEL DOORS

APPROYED DOOR STYLES: Z/4 GLASS:





















CERTIFIED TEST REPORTS:

NGTL 210-1897-7, 8, 9

Cartifying Engineer and License Number: Barry D. Portney, P.E. / 16258.

Unit Tested in Accordance with Mismi-Dade BODO PA202.

Ocor panels constructed from 26-paigs 0.017" thick steel skins. Both stiles constructed from wood. Top and rails constructed of 0.032" steel. Bottom and rails constructed of 0.032" steel. Interior cavity of size titled with rigid polyurethans from core. Sixb glazad with insulated glass mounted in a rigid plassic Ep lits surround.

Frame constructed of wood with an extruded aluminum bumper threshold.

PRODUCT COMPLIANCE LABELING:

TESTED IN ACCORDANCE WITH MIAMI-DADE SCCO PAIOZ

COMPANY NAME

To the best of my knowledge and shillty the above side-hinged exterior duor unit conterns to its requirements of the 2001 Florida Building Code, Chapter 17 (Structural Their and Inspections).

State of Florida, Professional Engineer Kurt Balthazor, P.E. — Liosas Number 56533






XX Unit

MAD WE WADDIZ-02


OUTSWING UNITS WITH DOUBLE DOOR

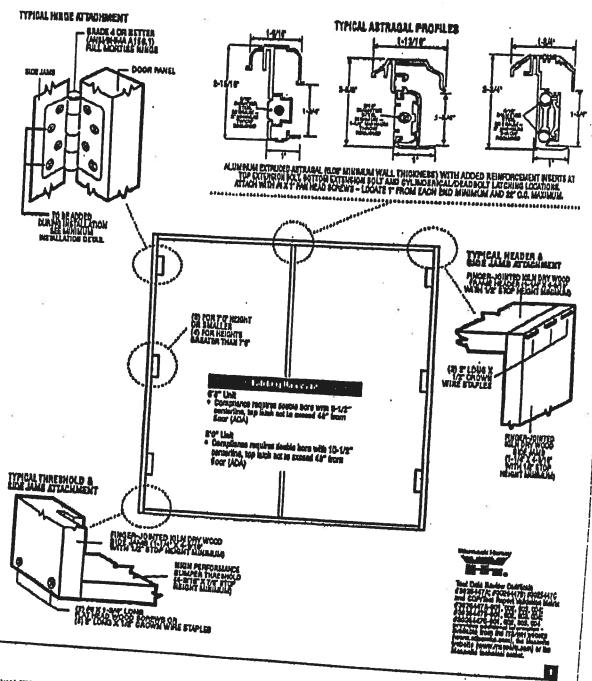


ann naims is annigh sideall passes. But annigh babes of begind passes and antight beningstand delibe and bades tourner 14' 1925 Masonite.


WAD-WE-WA0041-02

GLASS INSERT IN DOOR OR SIDELITE PANEL

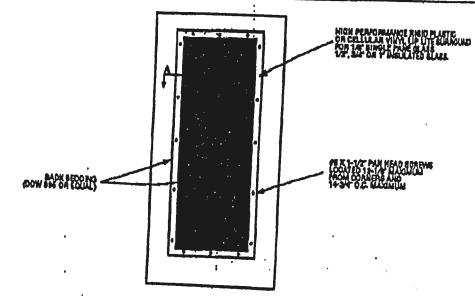

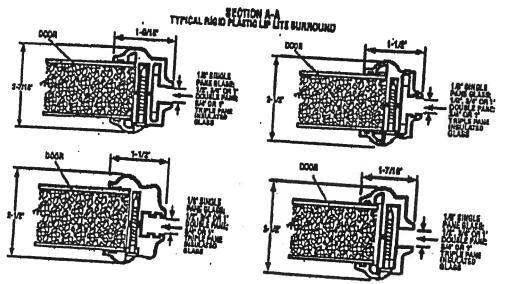


"Gizza inserts to be sub-Ested by intertaik Testing Services/ETL Semis or expressed selfettion service.





DOUBLE DOOR

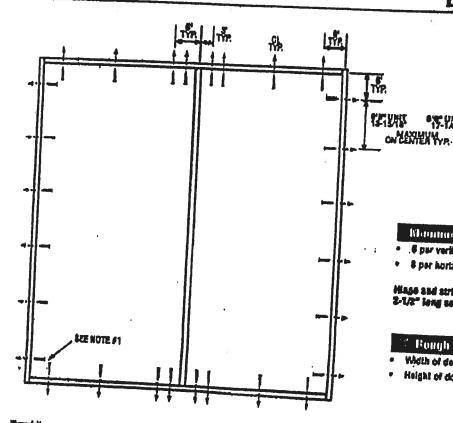

Manunon Fastener Count

14 per verticel insming member

SA DHIA

8 per kortzontal framing member

Mage and strike places require two 2-1/2" long serows per location.

A Rough Opening (RO)

- Width of door unit plus 1/2"
- Height of door unit plus 1/4".



Latching Hardware:

- · Compliance requires that GRADE 3 or better (ANSUBHMA A150.2) sylindrical and deutlock hardware be irratalled.
- UNITS COVERED BY GOP DOCUMENT 8247", 8247", 8242", 8247, 8212" or 8267 Compliance requires that 8" GRADE 1 (ANSI/SHMA A156.15) surface being be installed on lettch side of active door panel — (1) at top 'Suxed on required Design Pressure - see GOP sheet for details.


Notes:

- 1. Amber exiculations have been carried out with the lowest (legal) testaner rating from the different testaners being considered for use. Jamb and hard lestaners arebized for this unit include #8 and #10 wood server or 2/19" Tapcons, Threshold fastaners analyzed for this unit include #8 and #10 wood servers, 3/19" Tapcons, or Liquid Mails Builders Choice 480 (arequal structural adhasive).
- 2. The wood selew single shear design values come from Table 11.3A of ANSVAF & PA NDS for southern pine lumber with a side member thickness of 1-1A° and actions and minimum ambedment. The 2/16° Tapean single shear design values some from the ITW and ELCO Dade Country embedment. 2. Wood bucks by others, must be anemored properly to transfer leads to the structure.

M 16, 3405

Masonite.

DOUBLE DOOR

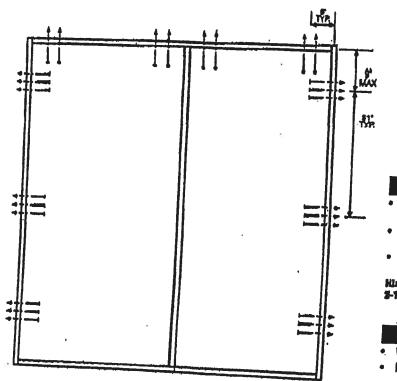

Minimum Fastener Count.

- 6 per vertical framing member for 7'0" heights and smaller
- 8 per vertical framing mamber for heights greater then 7'0"
- & per horizontal framing member

Hinge and sirks plates require buy 3-1/2" leng sersws par location.

Rough Opening (RO) 10

- Width of door walt plus 1/2"
- Height of door unit plus 1/4"



Laishing Hardware:

- · Complexes requires that GRADE 3 or better (ANSVEHMA A1882) sylindrical and deadlock hardware be leastailed.
- · UNITS COVERED BY COP DOCUMENT 0247*, 0267*, 8242*, 8247, \$282* or 8257
 Compliance requires that 8° GRADE-1 (ANRI/OHBLA A158.16) surface bods he intailed on latch side of active door panel (1) at top *Based on required Design Pressure - see COP sheat for details.

Notes:

- 1. Anchor calculations have been carried out with the fastener rating from the different fasteners being considered for use. Jamb and head Ancher excussions have been carried our with the stateous rating non-use quiestant mattheirs noting considers of the unit include #6 wood screws and 10d common halls. Threshold festimets analyzed for this unit include Uquid Halls
- 2. The wood screw and common stall stagle about design values come from ANSUAF & PA NDS for southern pine furniture with a side member trickness of 1-1/4° and achievement of minimum embedment of 1-1/4°. Wood bucks by others, must be anchored properly to transfer loads to the structure.

Distributed pro-

Masonite.

MI Home Products, Inc. 650 West Market St. P.O. Box 370 Gratz, PA 17030-0370

(717) 365-3300 (717) 362-7025 Fax

740/744 SINGLE HUNG (FIN & FLANGE) 165 SINGLE HUNG (FIN & FLANGE) BB165/740/744 FIXED (FIN & FLANGE)

- Test Reports
 - 165 Single Hung
 - #CTLA-787W (Fin)
 - #CTLA-787W-1 (Flange)
 - 740/744 Single Hung
 - #01-40351.03 (Fin)
 - #01-40351.04 (Flange)
 - 165/740/744 Fixed
- #NCTL-310-0005-2.1 (Fin)
 - # NCTL-310-0005-5.1 (Flange)
 - #01-40486.03 (2-Panel Fixed)
- Installation Instructions
- Sample 110/120/140 MPH Labels



AAMA/NWWDA 101/LS.2-97 TEST REPORT SUMMARY

Rendered to:

MI HOME PRODUCTS, INC.

SERIES/MODEL: 740/744 TYPE: Aluminum Single Hung Window with Nail Fin

Results
H R45 52 x 72
15 C
45 psf
24 lb max.
0.10 cfm/ft ²
6.75 psf
+67.5 psf
-70.8 psf
Passed
Grade 10

Reference should be made to Report No. 01-40351.03 for complete test specimen description and data.

MAH:baw

THIS FENESTRATION PRODUCT COMPLIES * WITH THE NEW FLORIDA BUILDING CODE

FOR RESIDENTIAL BUILDINGS WITH A MEAN ROOF HEIGHT OF 30 FT. OR LESS, EXPOSURE "B" (WHICH IS INLAND OF A LINE THAT IS 1600 FT. FROM THE COAST), AND WALL ZONE "5" (INSTALLED NEAR THE CORNER OF THE BUILDING).

PER ASTM E1300, THE CORRECT GLASS THICKNESS, BASED ON THE NEGATIVE DESIGN PRESSURE (DP) LISTED BELOW, HAS BEEN INSTALLED IN THIS UNIT. THE GLASS THICKNESS IS BASED ON ITS' WIDTH, HEIGHT, AND ASPECT RATIO.

Series 470HP SLIDING GLASS DOOR - all 6'- 8" High Panels

2'-6" WIDE DP +40.0 / -55.4

3'- 0" WIDE

DP +40.0 / -48.5


4'- 0" WIDE

titte, so region of

DP +40.0 / -40.3

THIS PRODUCT MEETS THE REQUIREMENTS FOR STRUCTURAL LOADS, WATER AND AIR INFILTRATION PER ATTACHED AAMA PERFORMANCE LABEL. BE ADVISED THAT IF LOADS ARE PLACED UP TO OR EXCEEDING THE TESTED LEVELS, THIS PRODUCT MAY BE ALTERED IN SUCH A WAY THAT FUTURE PERFORMANCE WILL BE REDUCED.

* COMPLIANCE MUST INCLUDE INSTALLATION ACCORDING TO MANUFACTURER'S INSTRUCTIONS AND FLORIDA CODE REQUIREMENTS.

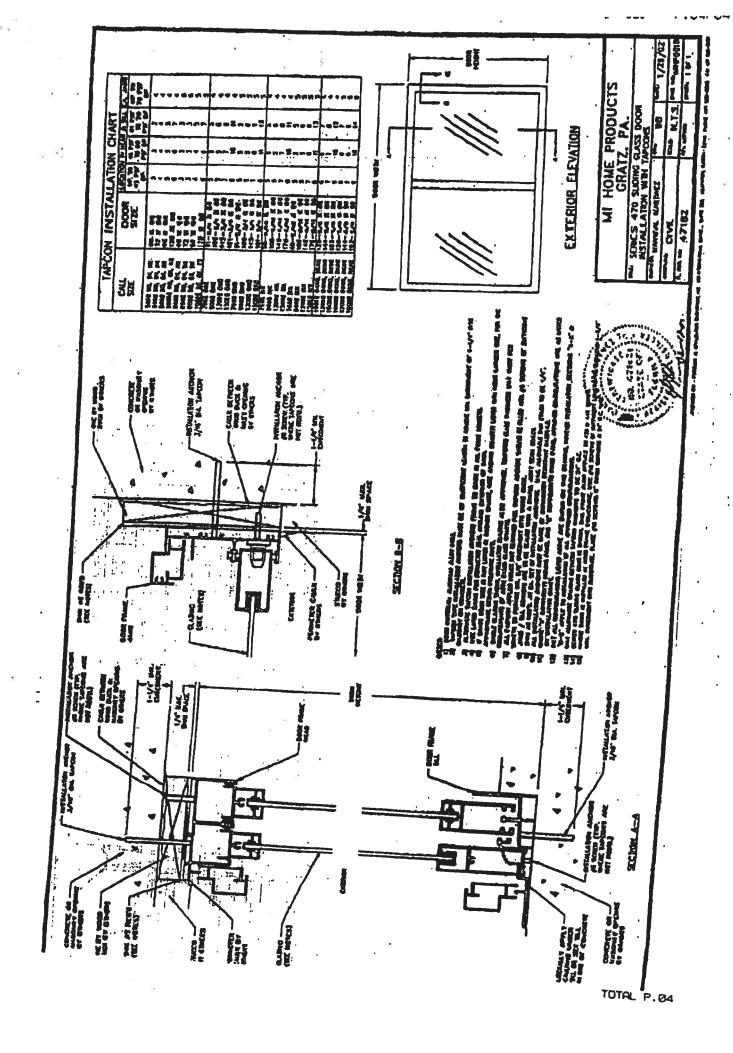



DOCUMENT CONTROL ADDENDUM #01-40351.00

Current Issue Date: 02/15/02

Report No.: 01-40351.01

Requested by: William Emley, MI Home Products, Inc.
Purpose: AAMA/NWWDA 101/I.S.2-97 testing of Series/Model 744 aluminum single hung window with flange.

Issued Date: 12/28/01

Comments: Florida P.E. seal required on report.

Certification copy to John Smith at Associated Laboratories, Inc.

Report No.: 01-40351.02

Requested by: William Emley, MI Home Products, Inc.

Purpose: Change of glass type. Issued Date: 12/28/01

Comments: Florida P.E. seal required on report.

Certification copy to John Smith at Associated Laboratories.

Report No.: 01-40351.03


Requested by: William Emley, MI Home Products, Inc.
Purpose: AAMA/NWWDA 101/I.S.2-97 testing of Series/Model 740/744 aluminum single hung window with nail fin.

Issued Date: 02/15/02

the glassia and provided the glassian and the glassian an Berniell Market, British Salvadorial Michiga

Comments: Florida P.E. seal required on report.

Certification copy to John Smith at Associated Laboratories, Inc.

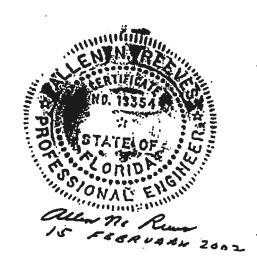



Test Results: (Continued)

* e21 T/C2ff1f2;	(Continued)	39	- 1
Paragraph	Title of Test - Test Method	Results	Allowed
2.1.8	Forced Entry Resistance per Al		HIOWEU
	Type: A Grade: 10	Ħ	
	Lock Manipulation Test	No entry	No entry
	Test A1 thru A5	No entry	No entry
	Test A7	No entry	No entry
	Lock Manipulation Test	No entry	No entry
Optional Pe	rformance	(E) (E) (E)	140 catty
4.4.1	Uniform Load Deflection per AS (Measurements reported were tak (Loads were held for 52 seconds) @ 45.0 psf (positive) @ 45.0 psf (negative)	en on the meting rail) 0.91"* 0.97"*	0.29" max. 0.29" max.
* Exceeds L/	175 for deflection, but meets all other	test requirements	
4.4.2	Uniform Load Structural per AST (Measurements reported were take (Loads held for 10 seconds) @ 67.5 psf (positive) @ 67.5 psf (negative)	ME 330 n on the meeting rail) 0.14"	0.20" max.
4.4.2	@ 70.8 psf (negative)	0.19"	0.20" max.
	(Quet 40)	0.20"	0.20" may

Detailed drawings, representative samples of the test specimen, and a copy of this report will be retained by ATI for a period of four years. The above results were secured by using the designated test methods and they indicate compliance with the performance requirements of the above referenced specification. This report does not constitute certification of this product, which may only be granted by the certification program administrator.

For ARCHITECTURAL TESTING, INC:

Technician

MAH:baw 01-40351.03

Director - Engineering Service

15 FEBRUARY 2002



Test Specimen Description: (Continued)

Drainage: Sloped sill

Reinforcement: No reinforcement was utilized.

Installation: The test specimen was installed into the #2 2 x 8 Spruce-Pine-Fir wood buck with 1" galvanized roofing nails through the nail fin every 8" on center. Polyurethane was used as a scalant under the nail fin and around the exterior perimeter.

Test Results:

The results	are tabulated as follows:		
Paragraph	Title of Test - Test Method	Results	474
2.2.1.6.1	Operating Force	24 lbs	Allowed
2.1.2	Air Infiltration (ASTM E 283)	24 105	30 lbs max.
APada diwa m	(25 mph)	$0.10 \mathrm{cfm/ft^2}$	0.30 cfm/ft ² max.
101/I.S. 2-9;	he tested specimen meets the perfor 7 for air infiltration	mance levels spec	ified in AAMA/NWW.DA
2.1.3	Water Resistance (ASTM E 547-	96	
2141	W1F = 0./3 psf	No leakage	No leakage
2.1.4.1	Uniform Load Deflection per AST (Measurements reported were take	ME 330	
. N	(Measurements reported were take (Loads were held for 52 seconds) @ 15.0 psf (positive) @ 15.0 psf (negative)	0.86"* 0.81"*	0.29" max,
Note: * Excee	eds L/175 for deflection, but meets all	Other tost	0.29" max.
2.1.4.2	UIIIIIIIII I AAA DA		
t ()	(Measurements reported were taken (Loads were held for 10 seconds) @ 22.5 psf (positive)	on the meeting rail)

214.2	TI IS	u olner test requir	rements.
2.1.4.2	(Measurements reported were tak	ME 330	
21 (* ⁴⁵	@ 22.5 psf (positive) @ 22.5 psf (negative)	0.01"	0.20" max.
2.2.1.6.2	Deglazing Test per ASTM E 987 In operating direction at 70 lbs	<0.01"	0.20" max.
	Top rail Bottom rail	0.06"/12%	0.50"/100%
	In remaining direction at 50 lbs	0.06"/12%	U.50"/100%
5	Left stile Right stile	0.03"/6% 0.03"/6%	0 significant () () () () () () () () () (



Test Specimen Description: (Continued)

Weatherstripping:

<u>Ouantity</u>	Location
1 Row	Fixed meeting rail interlock
1 Row	Fixed lite, stiles and top rail
1 Row	Bottom rail
1 Row	Active sash stiles
1 Row	Active sash stiles
	1 Row 1 Row

Frame Construction: All frame members were constructed of extruded aluminum with coped, butted and scaled corners fastened with two screws each. Fixed meeting rail was secured utilizing one screw in each end directly through exterior face into jamb. Silicone was utilized around exterior meeting rail/jamb joinery.

Sash Construction: All sash members were constructed of extruded aluminum with coped and butted corners fastened with one screw each.

Screen Construction: The screen frame was constructed from roll-formed aluminum members with plastic keyed corners. The screening consisted of a fiberglass mesh and was secured with a flexible vinyl spline.

Hardware:

Description	Quantity	Location
Plastic tilt latch	2 .	One each end of the interior Meeting rail
Metal sweep lock Balance assembly	2 .	13" from meeting rail ends
Screen tension spring	2	One per jamb
Till pin	2 7 2	One per end of screen stile
ere Torresta e la proposición de la companya de la Recordo de la companya de la company		One each end of bottom rail

allen M. Record



AAMA/NWWDA 101/I.S.2-97 TEST REPORT

Rendered to:

MI HOME PRODUCTS, INC. P.O. Box 370 Gratz, Pennsylvania 17030-0370

Report No: 01-40351.03

Test Dates: 10/22/01

And: 10/23/01

Report Date: 02/15/02 **Expiration Date:**

10/23/05 Project Summary: Architectural Testing, Inc. (ATI) was contracted by MI Home Products, Inc. to witness performance testing on a Series/Model 740/744, aluminum single hung window at MI Home Products, Inc.'s test facility in Elizabethville, Pennsylvania. successfully met the performance requirements for a H-R45 52 x 72 rating. The sample tested

Test Specification: The test specimen was evaluated in accordance with AAMA/NWWDA 101/I.S.2-97, Voluntary Specifications for Aluminum, Vinyl (PVC) and Wood Windows and Glass Doors.

Test Specimen Description:

Series/Model: 740/744

Type: Aluminum Single Hung Window With Nail Fin

Overall Size: 4' 4-1/8" wide by 5' 11-5/8" high

Active Sash Size: 4' 2-3/4" wide by 2' 11-5/8" high

Fixed Daylight Opening Size: 4' 1-1/8" wide by 2' 9" high


Screen Size: 4' 1-7/8" wide by 2' 11-5/16" high


Finish: All aluminum was polished.


Glazing Details: The active sash and fixed lite were glazed with one sheet of 1/8" thick clear tempered glass. Each sash was channel glazed using a flexible vinyl gasket.


130 Derry Court York, PA 17402-9405 phone: 717.764.7700 Bun Variable Maria Carling

a la se 🛬 📜 🕡 -



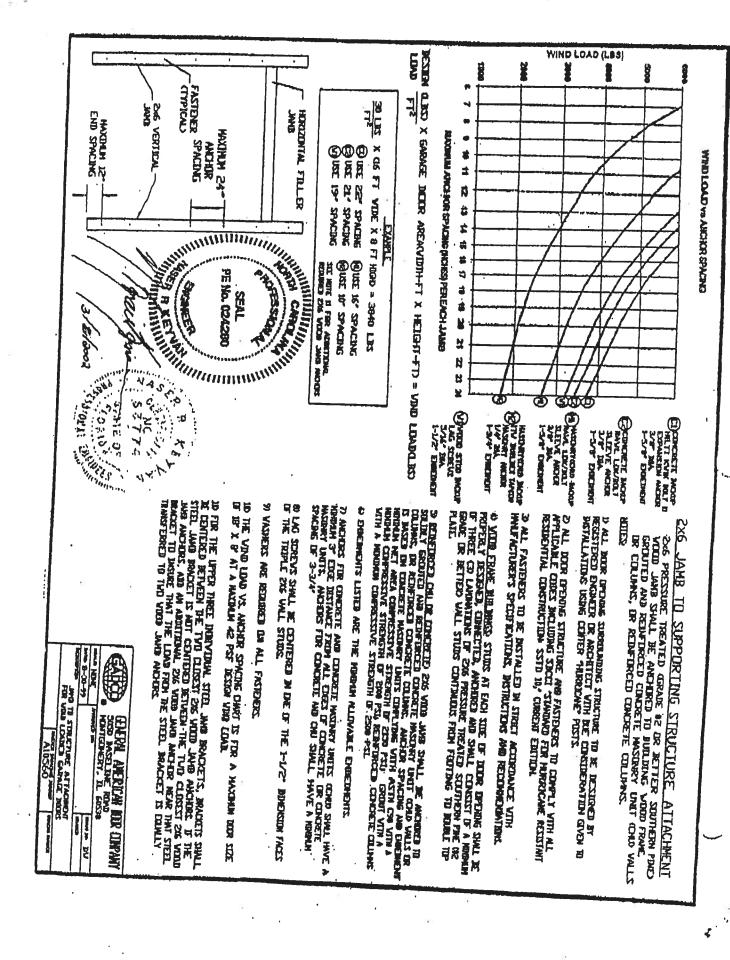


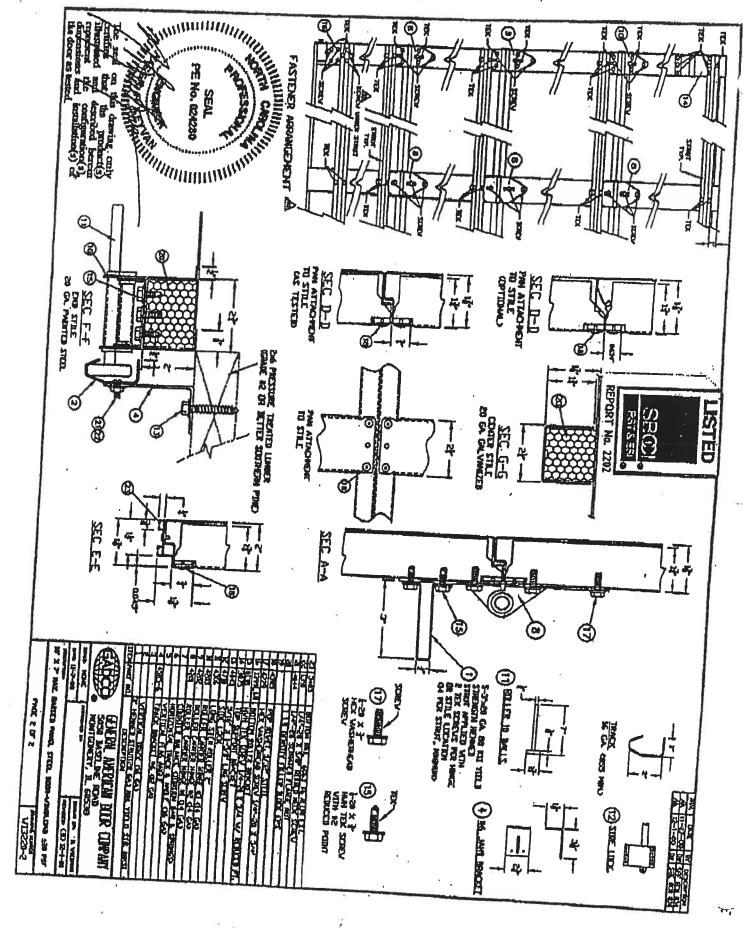

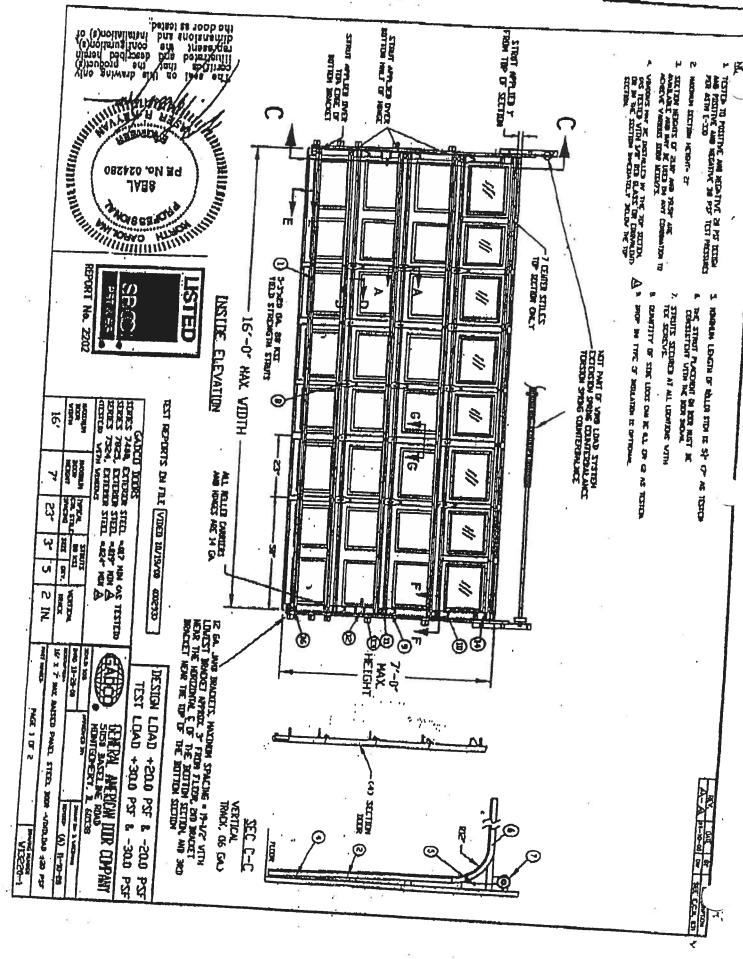

Anthony Power Header®

2600F_b - 1.9E

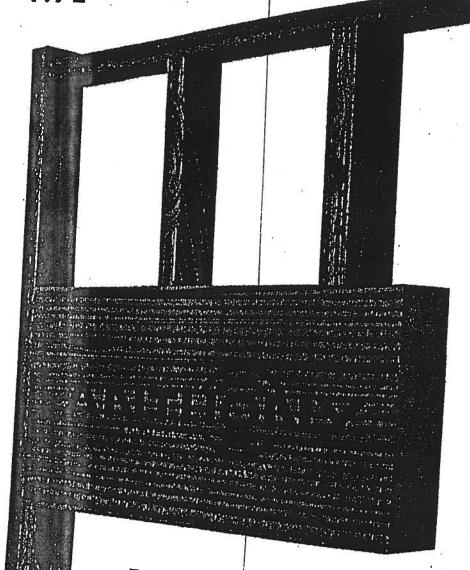

ony Power Header® Advantages

- Less Experience than LVL or PSL
- + Lighter than Sceel, LVL or PSL
- Pre-Cut Lengths
- ◆ Renewable Resource

Garage Header Sizing Tables

- + Cambered or Non-cambered
 - 3-1/2" Width to Match Framing
- One Piece No Nail Laminating
- Lifetime Warranty



3-1/2" WIDTH GARAGE HEADER APPLICATION - SINGLE STORY **HEADER SUPPORTING:** 1/2 ROOF SPAN

16'-3" 18'-3 91.3 16'-3" 16'-3" 18'-3" 18'-3" 16'-3" 18'-3" 11-1/4 12-5/8 8-3/8 8-3/8 12-5/8 12-5/8 8-3/8 12-5/8 14 8-3/8 15-3/8 8-3/8 14 16-3/4 8-3/8 12-5/8 14 8-3/8 12-5/8 14 8-3/8 12-5/8 14 8-3/8 12-5/8 15-3/8 8-3/8 14 15-3/8 15-3/8 8-3/8 12-5/8 8-3/8 14 12-5/8 14 8-3/8 12-5/8 15-3/8 8-3/8 15-3/8 8-3/8 14 16-3/4 9-3/4 15-3/8 8-3/8 12-5/8 15-3/8 8-3/8 15-3/8 8-3/8 14 15-3/8 15-3/8 9-3/4 12-5/8 14 8-3/8 14 15-3/8 15-3/8 8-3/8 15-3/8 16-3/4 15-3/8 9-3/4 8-3/8 15-3/8 8-3/8 14 15-3/8 14 16-3/4 8-3/8 15-3/8 9-3/4 9-3/4 14 15-3/8 8-3/8 14 16-3/4 15-3/8 8-1/8 15-3/8 9-3/4 9-3/4 8-3/8 15-3/8 8-3/8 15-3/8 8-3/8 15-3/8 9-3/4 11-1/4 8-3/8 14 16-3/4 8-3/8 15-3/8 15-3/8 11-1/4

												1.1			f(x, y)	
ing total				1/1//	$J_{\mu\nu}$											
(0) 14.7 ft. 4.	37.	16'-3"	18'-3"	9'-3"	16'-3"	18'-3"	9'-3"	16'-3'	18'-3'	T	91.31	16'-3"	18'-3"	9'-3"	16'-3"	
	8-3/8	11-1/4	12-5/8	8-3/8	11-1/4	12-5/8	8-3/8	11-1/4	12-5/8	†	8-3/8	11-1/4	12-5/8	8-3/8	12-5/8	+
	8-3/8	11-1/4	12-5/8	8-3/8	11-1/4	12-5/8	8-3/8	11-1/4	12-5/8	t	8-3/8	12-5/8	14	-	+	14
haring Paring	8-3/8	11-1/4	12-5/8	8-3/8	11-1/4	12-5/8	8-3/8	12-5/8	. 14	+	8-3/8	12-5/8	-	8-3/8	12-5/8	14
(q_{ij}, p_{ij})	8-3/8	17-1/4	12-5/8	8-3/8	12-5/8	14	8-3/8	12-5/8	+	+	-	-	14	.8-3/8	12-5/8	14
ji Diguri	8-3/8	11-1/4	12-5/8	8-3/8	-	-		12-3/6	14	1	8-3/8	12-5/8	14	8-3/8	12-5/8	14
dallada ji	-		-	0-3/6	12-5/8	-14	8-3/8	12-5/8	14	1	3/8	12-5/8	14	8-3/8	12-5/8	15-3/8
	8-3/8	12-5/8	14	8-3/8	12-5/8	14	8-3/8	12-5/8	14	t	-3/8	12-5/8	14			-
	8-3/8	12-5/8	14	8-3/8	12-5/8	14.	8-3/8	12-5/8	14	-	-			8-3/8	14	15-3/0
1777	8-3/8	12-5/8	14	8-3/8	12-5/8	14		-	-	Ц	-3/8	12-5/8	15-3/8	8-3/8	14	15-3/8
(- 1. N.	8-3/8	12-5/8	14	8-3/8	-		8-3/8	12-5/8	15-3/8	1	-3/8	14	15-3/8	8-3/8	14	100
				0-3/6	12-5/8	14	8-3/8	14	15-3/8	8	-3/8	14	15-3/8	8-3/8	15-3/8	M.

NOTES:

Table assumes a simple span header supporting a uniform load transferred from 1/2 the roof span plus a 2' soffit.


Roof live and dead loads shown are applied vertically to the horizontal projection. No reductions in roof live loads or snow loads were considered. The header weight is accounted for in the table.

Deflection is limited to L/240 for live load and L/180 for total load.

Headers are assumed to have continuous lateral support along top edge. Bearing length based on full width bearing is indicated as follows: Non-shaded sizes require two trimmers (3" bearing). Shaded sizes require three trimmers (4.5" bearing).

Shaded & outlined sizes require four trimmers (6" bearing).

** Applications where load carrying capacity of 16-3/4" depth has been exceeded. See AFP 30Fb POWER BEAM® literature or AFP's WoodWorks - Sizer Software.

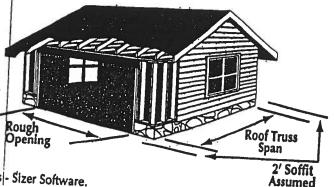

Anthony Power Header®

3-1/2" WIDTH GARAGE HEADER PLF CAPACITY

J. Popular		4)								3: 1:	
	1					and the second	THE REAL PROPERTY.				
					Sec. 21 16 4						h magazi
	$(E_{i},E_{i}^{*})^{*}$	Hill Holl	1,00	1.54	\$ 14d#	1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1			1000		
	lander Caman		10.11	1 9 34	1.0	or the following					
		radel	Vintagina.	4.41	No. of the	$M_{\rm c}$		1991	er bullers	-7.41	
144 896		1216	13.	1573		1/2/03/2		10.13			Rate of the last o
61 207-	254	330	390	510	552	669	752	824	SHALL SHALL		
14 145	180	231	277	359	391	510	732	024	37 37 W. C.		21.44
			1210	(1 007 07)	61 207 054	61 207 254 220 220	61 207 254 220 200 200	61 207 254 220 200 500	61 207 254 330 300 510 510	61 207: 254 330 300 510	61 207 254 330 300 510 750

	100	della di la cons	91.00 m. de	W. Jane	MARIN STAN	ad more as							
			1411		100, 40, 44	olof ma	t_{iij} , ϵ	KI !!!	3. 14 h 16	ha aya		W. 15 . 4.	
				les es									
est of re							L(x,y)			1/11	1776	4.70	ily taken
			(x,y)	() () () () () ()	194 h.	1. 1. 4. 5	1.14	1/2/		1. July	14.5	<i></i>	
1	THE RESERVE		STATE OF THE SECOND			a billion of	A Section						STATE OF THE STATE
		stall a letter	10/11/2/19	11 2 3	E Police	" ash	1. 1. Oak			10.000		degram	William Chair
	844	975	建筑地域	1322	14 (de)	in the second	14/66	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	tarria.				
	844 161		254	1322	300	y-Fig.	11/1/1618						
		975 207 145	254 180	1322 330 231	390 277	510 359	552	724	752	897			

1 - 1 - 10 - 11	: #16	1402 (1	•					
	1,000,000	tata yar	Be7(500)	officialism	a de la	Post Contract	4 SSMELE	244.4	il var e	341.7 A. 4.4.4.	L. Carrier de	total		Company of the last
						11	1171	(0.00)(-1)(-1)	$a_{ij} \in \{0, 1\}$	1000	distinct	Anticeg	1,1	
1.6.63									11:17:1					
(1) P. a.		1.0		See	191,11							77.	4	
	10.00	1.7%	103		17:10	10.50	1000		i final i			11111		
	562	778	888	1056	A Discontinuos	T. Sindhan	學學網	(中国)(()	Mark.	Section.	Sept.		1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	The G
4.4	107			1056.	1363	1367		1582		10.00				
		153	169	245	260	- 380	368	540	E01			46.37		
	76	107	120	171	185	267	-	-	501	715	664	864	840	Truck!
			-			20/	261	380	356	521	494	404	-	The Control of
							The Real Property lies, the Person of	-		341	471	684	609	813

NOTES:

- Values shown are the maximum uniform loads in pounds per lineal foot (PLF) that can be applied to the header. Header weight has
- Tables are based on simple span uniform load conditions using a design span equal to the center-to-center of bearing. Non-shaded areas are based on 3" of bearing at each support, shaded areas on 4.5" of bearing, and shaded & outlined areas on 6" of bearing at
- Headers are assumed to be loaded on the top edge with continuous lateral support along compression edge.
- Deflection limits are listed within the PLF table heading.

GARAGE HEADER SIZING USING PLF TABLES:

To size a garage header supporting roof only, determine the total load & live load in pounds per lineal foot (PLF). Check the appropriate PLF table for a header supporting roof loads only (125% Non-Snow vs. 115% Snow) and select a member with a total load and live load capacity which meets or exceeds the design load for the rough opening size. For a garage header supporting roof, wall, and floor framing. determine the total load and live load in pounds per lineal foot (PLF). Select a header size from the roof, wall, and floor table (100% load duration) which has a total load and live load capacity equal to or greater than the design load for the appropriate rough opening.

ENGINEERED WOOD SECTION PROPERTIES AND LOAD CAPACITIES

ALLOWABLE DESIGN STRESSES (PSI):

FLEXURAL STRESS (F_b) = 2600 COMPRESSION PERP. TO GRAIN ($F_{c\perp}$) = 740 HORIZONTAL SHEAR (F_v) = 225 MODULUS OF ELASTICITY (MOE) = 1.9 x 10⁶

Sengradova Wilderia Sengradova Wilderia	1 1777. 1 1446.			1000	l L		
	7.7	9.0	10.4	11.7	12.9	14.2	15.5
the second of the second	326	514	789	1115	1521	2014	2604
Survey of Section 1995	8865	12015	15996	20145	24772	29877	35460
Contract Co	3908	4550	5250	5892	6533	7175	7817

NOTES:

- 1. Beam weights are based on 38 pcf.
- 2. Moment capacities are based on a span of 21 feet and must be modified for other spans.
- 3. Flexural Stress, F_b, shall be modified by the Volume Factor, C_w as outlined in ATC 117 Design 1993 and the NDS for Wood Construction 1997.
- 4. Allowable design properties and load capacities are based on a load duration of 100 percent and dry use conditions.
- 5. The AITC NER 466 was used in calculating the above allowable design stresses for Power Header®.

GARAGE HEADER COMPARISONS

				Variation (de la constitución de		
						Park 18
	810 / 540	3-1/2" x 8-3/8"	3-1/2" x 9-5/8"	3-1/2" x 9"	3-1/2" x 9-1/4"	3-1/2" x 11-1/4"*
	990 / 720	3-1/2" x 9-3/4"	3-1/2" x 9-5/8"	3-1/2" x 10-1/2"	3-1/2" x 9-1/4"	3-1/2" x 11-1/4"*
	640 / 400	3-1/2" x 12-5/8"	. 3-1/2" x 13-3/4"	3-1/2" x 13-1/2"	3-1/2" x 14"	3-1/2" x 14"+
(19) (19)	765 / 510	3-1/2" x 14"	3-1/2" x 15-1/8"	3-1/2" x 15"	3-1/2" x 14"	
	750 / 480	3-1/2" x 15-3/8"	3-1/2" x 16-1/2"	3-1/2" x 16-1/2"	3-1/2" x 16"	3-1/2" x 16"* 3-1/2" x 18"*
	900 / 600	3-1/2" x 16-3/4"	3-1/2" x 17-7/8"	3-1/2" x 18"	3-1/2" x 16"	3-1/2" X 18"

For more information on Power Header®, or other laminated structural products from Anthony Forest Products Company please call 1-800-221-2326 or FAX at 870-862-6502.

Power Header® is a trademark of Anthony Forest Products Company Post Office Box 1877 • El Dorado, Arkansas 71731 Internet address: http://www.anthonyforest.com e-mail: info@anthonyforest.com
© 2001 Anthony Forest Products Company

Distributed by:





PRESTIQUE® HIGH DEFINITION®



RAISED PROFILE™

Prestique Plus High Definition and Prestique Gallery Collection™

Product size 13%"x 39%" Exposure5%" Pieces/Bundle.18 Bundles/Square ___4/98.5 sq.ft. Squares/Pallet.....11

50-year limited warranty period: non-prorated coverage for shingles and application labor for the initial 5 years, plus an option for transferability*; prorated coverage for application labor and shingles for balance of limited warranty period; 5-year limited wind warranty*,

Raised Profile

Product size ... 13%"x 38%" Exposure____5%" Pieces/Bundle.....22 Bundles/Square.....3/100 sq.ft. Squares/Pallet16

30-year limited warranty period: non-prorated coverage for shingles and application labor for the initial 5 years, plus an option for transferability*; prorated coverage for application labor and shingles for balance of limited warranty period; 5-year limited wind warranty*

Prestique I High Definition

Exposure Pieces/Bundle . . . 16 Bundles/Square . _4/98.5 sq.ft. Squares/Pallet ____14

40-year limited warranty period: non-prorated coverage for shingles and application labor for the initial 5 years, plus an option for transferability*; prorated coverage for application labor and shingles for balance of limited warranty period; 5-year limited wind warranty*.

HIP AND RIDGE SHINGLES

Seal-A-Ridge® w/FLX™

Size: 12"x 12" Exposure: 6%" Pieces/Bundle: 45

Coverage: 4 Bundles = 100 linear feet

Prestique High Definition

Product size____13%"x 38%" Exposure5%" Pieces/Bundle 22 Bundles/Square___3/100 sq.ft. Squares/Pallet _____16

30-year limited warranty period: non-prorated coverage for shingles and application labor for the initial 5 years, plus an option for transferability*; prorated coverage for application labor and shingles for balance of limited warranty period; 5-year limited wind warranty*.

Elk Starter Strip 52 Bundles/Pallet

18 Pallets/Truck 938 Bundles/Truck 19 Pieces/Bundle

1 Bundle = 120.33 linear feet

Available Colors: Antique State, Weatheredwood, Shakewood, Sablewood, Hickory, Barkwood**, Forest Green, Wedgewood**, Birchwood**, Sandalwood. Gallery Collection: Balsam Forest*, Weathered Sage*, Slenna Sunset*.

All Prestique, Raised Profile and Seal-A-Ridge roofing products contain Elk WindGuard® sealant. WindGuard activates with the sun's heat, bonding shingles into a wind and weather resistant cover that resists blow-offs and leaks.

Check for availability with built-in StainGuard® treatment to inhibit the discoloration of roofing granules caused by the growth of certain types of algae. Not

All Prestique and Raised Profile shingles meet UL® Wind Resistant (UL 997) and Class "A" Fire Ratings (UL 790); and ASTM Specifications D 3018, Type-I; D 3161, Type-I; E 108 and the requirements of ASTM D 3462.

All Prestique and Raised Profile shingles meet the latest Metro Dade building code requirements. *See actual limited warranty for conditions and limitations.

**Check for product availability.

SPECIFICATIONS



CCUPANCY

COLUMBIA COUNTY, FLORIDA

Department of Building and Zoning Inspection
This Certificate of Occupancy is issued to the below named permit holder for the building and premises at the below named location, and certifies that the work has been completed in

accordance with the Columbia County Building Code.

Parcel Number 15-4S-16-03023-519

Building permit No. 000026412

Use Classification SFD/UTILITY

Fire: 38.52

Permit Holder HUGO ESCALANTE

Owner of Building EWPL.INC

Total: Waste: 100.50 139.02

Location: 456 SW MORNING GLORY DR., LAKE CITY, FL

Date: 04/25/2008

Building Inspector

POST IN A CONSPICUOUS PLACE (Business Places Only)