SYSTEM INFORMATION			
MODULE HANWHA Q.PEAK DUO BLK ML-G10+ 400			
INVERTER	ENPHASE IQ8PLUS-72-2-US		
RACKING	UNIRAC NXT HORIZON 2-RAIL RACKING SYSTEM		
SYSTEM SIZE (DC)	11.6 KW		
LOCATION	30.1007573,-82.5754748		

CLIMATIC & GEOGRAPHIC DESIGN CRITERIA TABLE R301.2(1)			
SPEED (MPH)	120		
TOPOGRAPHIC EFFECTS	В		
SPECIAL WIND REGION	NO		
WIND BORNE DEBRIS ZONE	2		
SEISMIC DESIGN CATEGORY	С		
CLIMATE ZONE	2A		
WIND EXPOSURE CATETORY	В		

	PLAN KEY				
PV-1	COVER PAGE				
PV-1.1	ATTACHMENT DETAIL				
PV-1.1(2)	ATTACHMENT DETAIL				
PV-1.2	INVERTER SPECS				
PV-1.3	COMBINER SPECS				
PV-1.4	PANEL SPECS				
PV-2	PANEL LAYOUT				
PV-3	ELETRICAL				
PV-3.1	ELECTRICAL CONT.				
PV-3.2	EQUIPMENT LABELS				

# **GENERAL NOTES:**

THIS PV SYSTEM HAS BEEN DESIGNED TO MEET THE MINIMUM DESIGN STANDARDS FOR BUILDING AND OTHER STRUCTURES OF THE ASCE 7-22, 8TH EDITION 2023 FLORIDA RESIDENTIAL CODE, 8TH EDITION 2023 FLORIDA BUILDING CODE, 8TH EDITION 2023 FLORIDA FIRE PREVENTION CODE, NEC 2020 AND ALL LOCAL CODES & ORDINANCES.

ROOF SHALL HAVE NO MORE THAN TWO LAYERS OF COVERING IN ADDITION TO THE SOLAR EQUIPMENT.

INSTALLATION OF SOLAR EQUIPMENT SHALL BE FLUSH MOUNTED, PARALLEL TO AND NO MORE THAN 6-INCHES ABOVE THE SURFACE OF THE ROOF.

ANY PLUMBING VENTS ARE NOT TO BE CUT OR COVERED FOR SOLAR EQUIPMENT INSTALLATION. ANY RELOCATION OR MODIFICATION OF THE VENT REQUIRES A PLUMBING PERMIT AND INSPECTION.

ALL DESIGN, CALCULATIONS ARE PERFORMED BY MICHAEL S. REZK, P.E. PROFESSIONAL ENGINEER, WITH LICENCE No. 95844.

# **INVERTER PLACEMENT:**

SYSTEM UTILIZES "ENPHASE" MICRO-INVERTERS WITH RAPID SHUTDOWN CONTROL LOCATED ON THE BACK SIDE OF EACH MODULE.

# **STRUCTURAL STATEMENT:**

THE EXISTING STRUCTURE IS ADEQUATE TO SUPPORT THE NEW LOADS IMPOSED BY THE PHOTOVOLTAIC MODULE SYSTEM INCLUDING UPLIFT & SHEAR.EXISTING RAFTER SIZES & DIMENSIONS CONFORM TO 8TH EDITION 2023 FLORIDA RESIDENTIAL CODE

MOUNTING BRACKETS AND HARDWARE MEET OR EXCEED FLORIDA CODE REQUIREMENTS FOR THE DESIGN CRITERIA OF THE TOWN.

# **FSEC CERTIFICATION STATEMENT:**

PER FL. STATUE 377.705, I, MINA A. MAKAR PE# 86753, CERTIFICATE OF AUTHORIZATION #33404, AN ENGINEER LICENSED PURSUANT TO CHAPTER 471, CERTIFY THAT THE PV ELECTRICAL SYSTEM AND ELECTRICAL COMPONENTS ARE DESIGNED AND APPROVED USING THE STANDARDS CONTAINED IN THE MOST RECENT VERSION OF THE FLORIDA BUILDING CODE. FBC 2023

	TABLE R301.2.1.3										
	WIND SPEED CONVERSIONS <sup>a</sup>										
V <sub>ult</sub>	V <sub>ult</sub> 110 115 120 130 140 150 160 170 180 190 200							200			
V <sub>asd</sub>	85	89	93	101	108	116	124	132	139	147	155

FBC, RESIDENTIAL 2023

For SI: 1 mile per hour = 0.447 m/s.

a. Linear interpolation is permitted.


HANWHA Q.PEAK DUO BLK ML-G10+ 400 400 WATT MODULE 74" X 41.1" X 1.26" (SEE DATASHEET)

29
29
64
13
0
1
1
2
2



PRO CUSTOM SOLAR LLC D.B.A. MOMENTUM SOLAR 325 HIGH STREET, METUCHEN, NJ 08840 (732) 902-6224 MOMENTUMSOLAR.COM

# **PROFESSIONAL ENGINEERING**



Digitally signed by Mina A Makar. Reason: This item has been electronically signed and sealed by [Mina A. Makar, PE 86753, COA # 33404] on the Date and Time Stamp shown using a digital signature. Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies

Date: 2024.02.16 09:02:49 -05:00

# **SOLAR CONTRACTOR**

CAMERON CHRISTENSEN
CERTIFIED SOLAR CONTRACTOR LICENSE NUMBER: CVC57036 MOMENTUM SOLAR 5728 MAJOR BLVD. SUITE 307, ORLANDO FL. 32819

#### **CUSTOMER INFORMATION**

**RANDOLPH HORTON - MS145642** 1315 SOUTH EAST COUNTY ROAD 245 LAKE CITY, FL 32025 3863657997


# **PV SYSTEM INFORMATION**


SYSTEM SIZE (DC): 11.6 KW 29 MODULES: HANWHA Q.PEAK DUO BLK ML-G10+ 400 29 INVERTERS: ENPHASE IQ8PLUS-72-2-US

PROJECT INFORMATION					
NITIAL	DATE: 2/15/2024	DESIGNER: KJL			
EV:	DATE:	DESIGNER:			
EV:	DATE:	DESIGNER:			

**COVER PAGE** 

PV-1

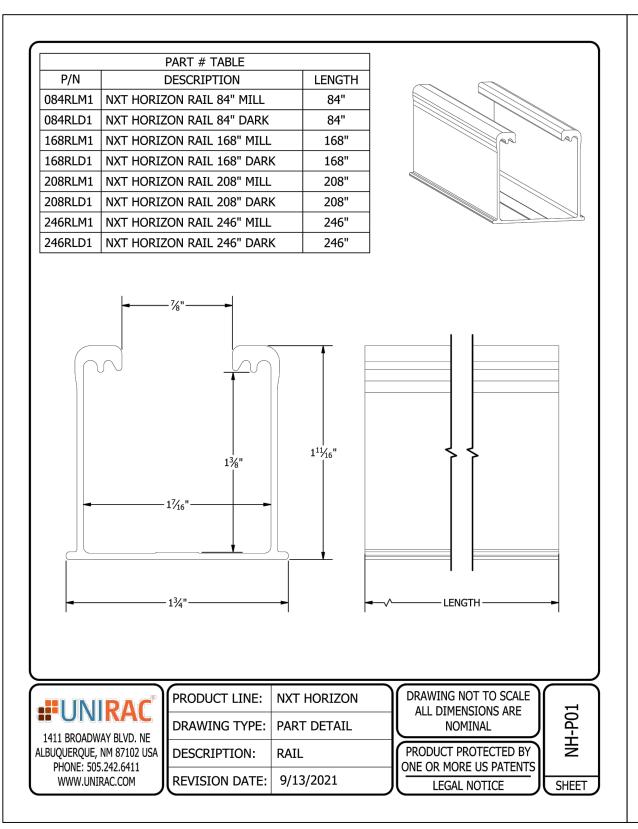


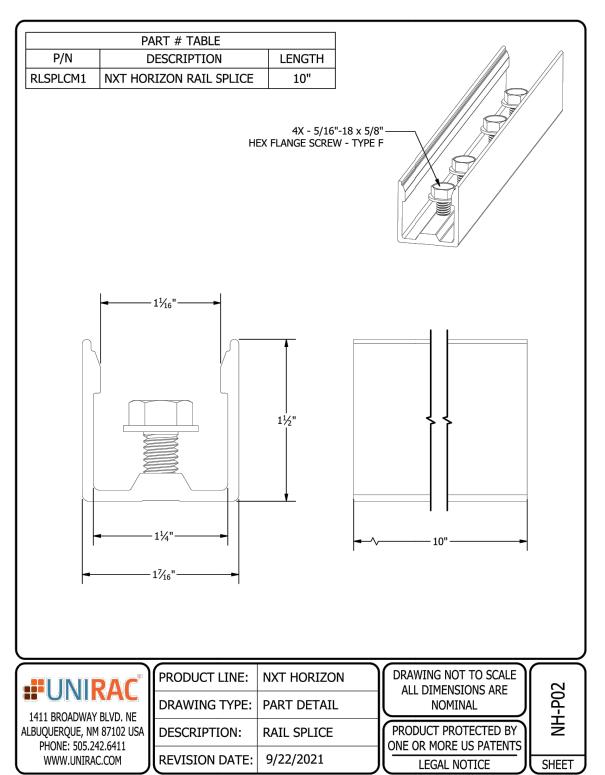



PRO CUSTOM SOLAR LLC D.B.A. MOMENTUM SOLAR 325 HIGH STREET, METUCHEN, NJ 08840 (732) 902-6224 MOMENTUMSOLAR.COM

# PROFESSIONAL ENGINEERING



Digitally signed by Mina A Makar.
Reason: This item has been
electronically signed and sealed by
[Mina A. Makar, PE 86753, COA #
33404] on the Date and Time Stamp
shown using a digital signature.
Printed copies of this document are
not considered signed and sealed
and the signature must be verified
on any electronic copies

Date: 2024.02.16 09:02:49 -05:00

# SOLAR CONTRACTOR

CAMERUN CHRISTENSEN

CERTIFIED SOLAR CONTRACTOR LICENSE NUMBER: CVC57036

MOMENTUM SOLAR

5728 MAJOR BLVD. SUITE 307, ORLANDO FL. 32819

# **CUSTOMER INFORMATION**

RANDOLPH HORTON - MS145642 1315 SOUTH EAST COUNTY ROAD 245 LAKE CITY, FL 32025 3863657997

# **PV SYSTEM INFORMATION**

SYSTEM SIZE (DC): 11.6 KW
29 MODULES: HANWHA Q.PEAK DUO BLK
ML-G10+ 400
29 INVERTERS: ENPHASE
IQ8PLUS-72-2-US


PROJECT INFORMATION

INITIAL DATE: 2/15/2024 DESIGNER: KJL

REV: DATE: DESIGNER:

REV: DATE: DESIGNER:

ATTACHMENT DETAIL

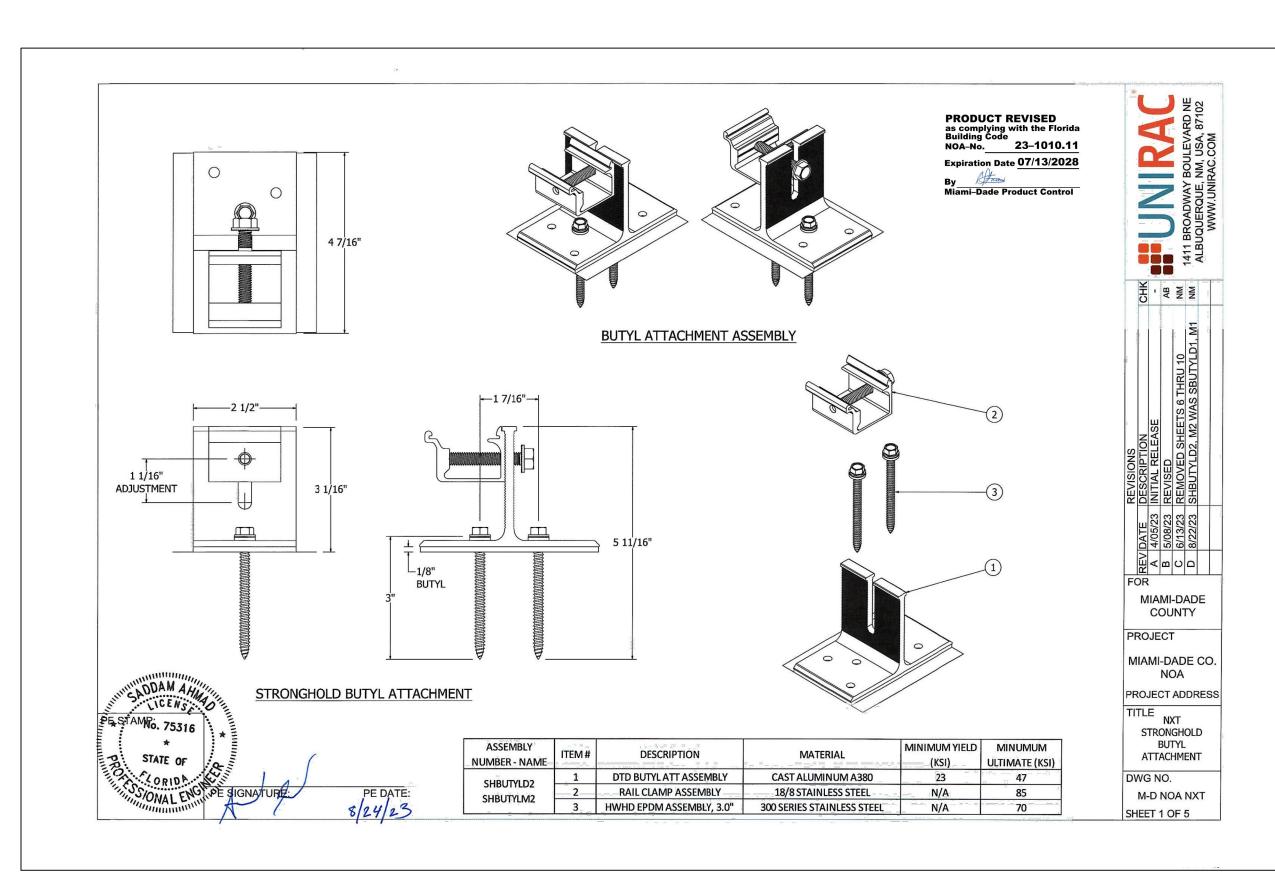


ATTACHMENT DETAIL FOR SHINGLE ROOF



PRO CUSTOM SOLAR LLC D.B.A. MOMENTUM SOLAR 325 HIGH STREET, METUCHEN, NJ 08840 (732) 902-6224 MOMENTUMSOLAR.COM

# PROFESSIONAL ENGINEERING



Digitally signed by Mina A Makar.
Reason: This item has been
electronically signed and sealed by
[Mina A. Makar, PE 86753, COA #
33404] on the Date and Time Stamp
shown using a digital signature.
Printed copies of this document are
not considered signed and sealed
and the signature must be verified
on any electronic copies
Date: 2024.02.16 09:02:49 -05:00

# SOLAR CONTRACTOR

CAMERON CHRISTENSEN
CERTIFIED SOLAR CONTRACTIOR LICENSE NUMBER: CVC570
MOMENTUM SOLAR
5728 MAJOR BLVD. SUITE 307, ORLANDO FL. 32819

# **CUSTOMER INFORMATION**

RANDOLPH HORTON - MS145642 1315 SOUTH EAST COUNTY ROAD 245 LAKE CITY, FL 32025 3863657997

# **PV SYSTEM INFORMATION**

SYSTEM SIZE (DC ): 11.6 KW
29 MODULES: HANWHA Q.PEAK DUO BLK
ML-G10+ 400
29 INVERTERS: ENPHASE
IQ8PLUS-72-2-US

	PROJECT INFORMA	TION
INITIAL	DATE: 2/15/2024	DESIGNER: KJL
REV:	DATE:	DESIGNER:
REV:	DATE:	DESIGNER:

ATTACHMENT DETAIL

PV-1.1 (2)







# IQ8 and IQ8+ Microinverters

Our newest IQ8 Microinverters are the industry's first microgrid-forming, softwaredefined microinverters with split-phase power conversion capability to convert DC power to AC power efficiently. The brain of the semiconductor-based microinverter is our proprietary application-specific integrated circuit (ASIC) which enables the microinverter to operate in grid-tied or off-grid modes. This chip is built in advanced 55nm technology with high speed digital logic and has super-fast response times to changing loads and grid events, alleviating constraints on battery sizing for home energy systems.



Part of the Enphase Energy System, IQ8 Series Microinverters integrate with the Enphase IQ Battery, Enphase IQ Gateway, and the Enphase App monitoring



Connect PV modules quickly and easily to IQ8 Series Microinverters using the included Q-DCC-2 adapter cable with plug-n-play MC4 connectors

standards with more than one million cumulative hours of power-on testing, enabling an industryeading limited warranty of up to 25 years.



IQ8 Series Microinverters are UL Listed as PV Rapid Shut Down Equipment and conform with various regulations, when installed according to

© 2022 Enphase Energy. All rights reserved. Enphase, the Enphase logo, IQ8 Microinverters, and other names are trademarks of Enphase Energy, Inc. Data subject to change

IQ8SP-DS-0002-01-EN-US-2022-03-17

#### Easy to install

- · Lightweight and compact with plug-n-play connectors
- · Power Line Communication (PLC) between components
- · Faster installation with simple two-wire cabling

#### High productivity and reliability

- Produce power even when the grid is down\*
- · More than one million cumulative hours of testing
- · Class II double-insulated enclosure
- · Optimized for the latest highpowered PV modules

#### Microgrid-forming

- · Complies with the latest advanced grid support\*\*
- · Remote automatic updates for the latest grid requirements
- · Configurable to support a wide range of grid profiles
- Meets CA Rule 21 (UL 1741-SA) requirements
- \* Only when installed with IQ System Controller 2, meets UI 1741.
- \*\* IQ8 and IQ8Plus supports split phase, 240V

# IQ8 and IQ8+ Microinverters

INPUT DATA (DC)		108-60-2-US	108PLUS-72-2-US
Commonly used module pairings <sup>1</sup>	W	235 – 350	235 – 440
Module compatibility		60-cell/120 half-cell	60-cell/120 half-cell, 66-cell/132 half-cell and 72-cell/144 half-cell
MPPT voltage range	٧	27 - 37	29 - 45
Operating range	٧	25 – 48	25 – 58
Min/max start voltage	٧	30 / 48	30 / 58
Max input DC voltage	٧	50	60
Max DC current <sup>2</sup> [module lsc]	Α	1	5
Overvoltage class DC port		ı	II
DC port backfeed current	mA		0
PV array configuration		1x1 Ungrounded array; No additional DC side protection requ	uired; AC side protection requires max 20A per branch circuit
OUTPUT DATA (AC)		IQ8-60-2-US	IQ8PLUS-72-2-US

OUTPUT DATA (AC)		108-60-2-US	108PLUS-72-2-US
Peak output power	VA	245	300
Max continuous output power	VA	240	290
Nominal (L-L) voltage/range <sup>3</sup>	V	240	/ 211 - 264
Max continuous output current	A	1.0	1.21
Nominal frequency	Hz		60
Extended frequency range	Hz	5	50 - 68
AC short circuit fault current over 3 cycles	Arms		2
Max units per 20 A (L-L) branch circuit	t <sup>4</sup>	16	13
Total harmonic distortion			<5%
Overvoltage class AC port			III
AC port backfeed current	mA		30
Power factor setting			1.0
Grid-tied power factor (adjustable)		0.85 leadir	ng – 0.85 lagging
Peak efficiency	%	97.5	97.6
CEC weighted efficiency	%	97	97
Night-time power consumption	mW		60

MECHANICAL DATA		
Ambient temperature range	-40°C to +60°C (-40°F to +140°F)	
Relative humidity range	4% to 100% (condensing)	
DC Connector type	MC4	
Dimensions (HxWxD)	212 mm (8.3") x 175 mm (6.9") x 30.2 mm (1.2")	
Weight	1.08 kg (2.38 lbs)	
Cooling	Natural convection - no fans	
Approved for wet locations	Yes	
Pollution degree	PD3	
Enclosure	Class II double-insulated, corrosion resistant polymeric enclosure	
Environ. category / UV exposure rating	NEMA Type 6 / outdoor	

COMPLIANCE Certifications

CA Rule 21 (UL 1741-SA), UL 62109-1, UL1741/IEEE1547, FCC Part 15 Class B, ICES-0003 Class B, CAN/CSA-C22.2 NO. 107.1-01

This product is UL Listed as PV Rapid Shut Down Equipment and conforms with NEC 2014, NEC 2017, and NEC 2020 section 690.12 and C22.1-2018 Rule 64-218 Rapid Shutdown of PV Systems, for AC and DC conductors, when installed according to

(1) No enforced DC/AC ratio. See the compatibility calculator at https://link.enphase.com/module-compatibility (2) Maximum continuous input DC current is 10.6A (3) Nominal voltage range can be extended beyond nominal if required


by the utility. (4) Limits may vary. Refer to local requirements to define the number of microinverters per branch in your area.

IQ8SP-DS-0002-01-EN-US-2022-03-17



PRO CUSTOM SOLAR LLC D.B.A. MOMENTUM SOLAR 325 HIGH STREET, METUCHEN, NJ 08840 (732) 902-6224 MOMENTUMSOLAR.COM

# **PROFESSIONAL ENGINEERING**



Digitally signed by Mina A Makar. Reason: This item has been electronically signed and sealed by [Mina A. Makar, PE 86753, COA # 33404] on the Date and Time Stamp shown using a digital signature. Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies Date: 2024.02.16 09:02:49 -05:00

# SOLAR CONTRACTOR

CAMERON CHRISTENSEN
CERTIFIED SOLAR CONTRACTOR LICENSE NUMBER: CVC57036 MOMENTUM SOLAR 5728 MAJOR BLVD. SUITE 307, ORLANDO FL. 32819

#### **CUSTOMER INFORMATION**

RANDOLPH HORTON - MS145642 1315 SOUTH EAST COUNTY ROAD 245 LAKE CITY, FL 32025 3863657997

#### **PV SYSTEM INFORMATION**

SYSTEM SIZE (DC): 11.6 KW 29 MODULES: HANWHA Q.PEAK DUO BLK ML-G10+ 400 29 INVERTERS: ENPHASE IQ8PLUS-72-2-US

PROJECT INFORMATION					
INITIAL	DATE: 2/15/2024	DESIGNER: KJL			
REV:	DATE:	DESIGNER:			
REV:	DATE:	DESIGNER:			

**INVERTER DETAIL** 

Data Sheet **Enphase Networking** 

# **IQ Combiner 4/4C**



The IQ Combiner 4/4C with IQ Gateway and integrated LTE-M1 cell modem (included only with IQ Combiner 4C) consolidates interconnection equipment into a single enclosure. It streamlines IQ Microinverters and storage installations by providing a consistent, pre-wired solution for residential applications. It offers up to four 2-pole input circuits and Eaton BR series busbar assembly.

#### Smart

- · Includes IQ Gateway for communication and control
- · Includes Mobile Connect cellular modem (CELLMODEM-M1-06-SP-05), included only with IQ Combiner 4C
- · Includes solar shield to match Enphase IQ Battery aesthetics and deflect heat
- · Supports Wi-Fi, Ethernet, or cellular connectivity
- · Optional AC receptacle available for PLC bridge
- · Provides production metering and consumption monitoring

- · Mounts on single stud with centered brackets
- Supports bottom, back and side conduit entry
- · Allows up to four 2-pole branch circuits for 240VAC plug-in breakers (not included)
- · 80A total PV or storage branch circuits

#### Reliable

- Durable NRTL-certified NEMA type 3R enclosure
- · Five-year limited warranty
- Two years labor reimbursement program coverage included for both the IQ Combiner SKU's
- X2-IQ-AM1-240-4 and X2-IQ-AM1-240-4C comply with IEEE 1547:2018 (UL 1741-SB, 3rd Ed.)



To learn more about Enphase offerings, visit enphase.com IQ-C-4-4C-DS-0103-EN-US-12-29-2022




MODEL NUMBER	
IQ Combiner 4 X-IQ-AM1-240-4 X2-IQ-AM1-240-4 (IEEE 1547:2018)	IQ Combiner 4 with IQ Gateway printed circuit board for integrated revenue grade PV production metering (ANSI C12.20 $\pm$ 0.5%) and consumption monitoring ( $\pm$ 2.5%). Includes a silver solar shield to match the IQ Battery and IQ System Controller 2 and to deflect heat.
IQ Combiner 4C X-IQ-AM1-240-4C X2-IQ-AM1-240-4C (IEEE 1547:2018)	IQ Combiner 4C with IQ Gateway printed circuit board for integrated revenue grade PV production metering (ANSI C12.20 ± 0.5 and consumption monitoring (± 2.5%). Includes Mobile Connect cellular modem (CELLMODEM-M1-06-SP-05), a plug-and-play industrial-grade cell modem for systems up to 60 microinverters. (Available in the US, Canada, Mexico, Puerto Rico, and the US Virgin Islands, where there is adequate cellular service in the installation area.) Includes a silver solar shield to match the IQ Battery and IQ System Controller and to deflect heat.
ACCESSORIES AND REPLACEMENT PART	S (not included, order separately)
Supported microinverters	IQ6, IQ7, and IQ8. (Do not mix IQ6/7 Microinverters with IQ8)
Communications Kit COMMS-CELLMODEM-M1-06 CELLMODEM-M1-06-SP-05 CELLMODEM-M1-06-AT-05	- Includes COMMS-KIT-01 and CELLMODEM-M1-06-SP-05 with 5-year Sprint data plan - 4G based LTE-M1 cellular modem with 5-year Sprint data plan - 4G based LTE-M1 cellular modem with 5-year AT&T data plan
Circuit Breakers BRK-10A-2-240V BRK-15A-2-240V BRK-20A-2P-240V BRK-15A-2P-240V-B BRK-20A-2P-240V-B	Supports Eaton BR210, BR215, BR220, BR230, BR240, BR250, and BR260 circuit breakers. Circuit breaker, 2 pole, 10A, Eaton BR210 Circuit breaker, 2 pole, 15A, Eaton BR215 Circuit breaker, 2 pole, 20A, Eaton BR220 Circuit breaker, 2 pole, 15A, Eaton BR215B with hold down kit support Circuit breaker, 2 pole, 15A, Eaton BR220B with hold down kit support
XA-SOLARSHIELD-ES	Replacement solar shield for IQ Combiner 4/4C
XA-PLUG-120-3	Accessory receptacle for Power Line Carrier in IQ Combiner 4/4C (required for EPLC-01)
X-IQ-NA-HD-125A	Hold-down kit for Eaton circuit breaker with screws
Consumption monitoring CT (CT-200-SPLIT/CT-200-CLAMP)	A pair of 200A split core current transformers
ELECTRICAL SPECIFICATIONS	
Rating	Continuous duty
System voltage	120/240VAC, 60 Hz
Eaton BR series busbar rating	125A
Max. continuous current rating	65A
Max. continuous current rating (input from PV/storage)	64A
Max. fuse/circuit rating (output)  Branch circuits (solar and/or storage)	90A Up to four 2-pole Eaton BR series Distributed Generation (DG) breakers only (not included)
Max. total branch circuit breaker rating (input)	80A of distributed generation/95A with IQ Gateway breaker included
IQ Gateway breaker	10A or 15A rating GE/Siemens/Eaton included
Production metering CT	200A solid core pre-installed and wired to IQ Gateway
MECHANICAL DATA	
Dimensions (WxHxD)	37.5 cm x 49.5 cm x 16.8 cm (14.75 in x 19.5 in x 6.63 in). Height is 53.5 cm (21.06 in) with mounting brackets.
Weight	7.5 kg (16.5 lbs)
Ambient temperature range	-40°C to +46°C (-40°F to 115°F)
· · · · ·	Natural convection, plus heat shield
Cooling	**
Enclosure environmental rating  Wire sizes  Altitude	Outdoor, NRTL-certified, NEMA type 3R, polycarbonate construction  • 20A to 50A breaker inputs: 14 to 4 AWG copper conductors  • 60A breaker branch input: 4 to 1/0 AWG copper conductors  • Main lug combined output: 10 to 2/0 AWG copper conductors  • Neutral and ground: 14 to 1/0 copper conductors  • Always follow local code requirements for conductor sizing.  Up to 3,000 meters (9,842 feet)
INTERNET CONNECTION OPTIONS	
Integrated Wi-Fi	IEEE 802.11b/g/n
Cellular	CELLMODEM-M1-06-SP-05, CELLMODEM-M1-06-AT-05 (4G based LTE-M1 cellular modem). Note that an Mobile Connect cellular modem is required for all Enphase Energy System installations.
Ethernet	Optional, IEEE 802.3, Cat5E (or Cat6) UTP Ethernet cable (not included)
COMPLIANCE	CA Pulo 21 (III 1741 CA)
Compliance, IQ Combiner	CA Rule 21 (UL 1741-SA) IEEE 1547:2018 - UL 1741-SB, 3 <sup>rd</sup> Ed. (X2-IQ-AM1-240-4 and X2-IQ-AM1-240-4C) CAN/CSA C22.2 No. 107.1, Title 47 CFR, Part 15, Class B, ICES 003 Production metering: ANSI C12.20 accuracy class 0.5 (PV production) Consumption metering: accuracy class 2.5
Compliance, IQ Gateway	UL 60601-1/CANCSA 22.2 No. 61010-1

© 2022 Enphase Energy, All rights reserved. Enphase, the Enphase logo, IQ Combiner 4/4C, and other names are trademarks of



PRO CUSTOM SOLAR LLC D.B.A. MOMENTUM SOLAR 325 HIGH STREET, METUCHEN, NJ 08840 (732) 902-6224 MOMENTUMSOLAR.COM

# **PROFESSIONAL ENGINEERING**



Digitally signed by Mina A Makar. Reason: This item has been electronically signed and sealed by [Mina A. Makar, PE 86753, COA # 33404] on the Date and Time Stamp shown using a digital signature. Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies

Date: 2024.02.16 09:02:49 -05:00

# SOLAR CONTRACTOR

CAMERON CHRISTENSEN
CERTIFIED SOLAR CONTRACTOR LICENSE NUMBER: CVC57036 MOMENTUM SOLAR 5728 MAJOR BLVD. SUITE 307, ORLANDO FL. 32819

# **CUSTOMER INFORMATION**

RANDOLPH HORTON - MS145642 1315 SOUTH EAST COUNTY ROAD 245 LAKE CITY, FL 32025 3863657997

#### **PV SYSTEM INFORMATION**

SYSTEM SIZE (DC): 11.6 KW 29 MODULES: HANWHA Q.PEAK DUO BLK ML-G10+ 400 29 INVERTERS: ENPHASE IQ8PLUS-72-2-US

	PROJECT INFORMA	TION
INITIAL	DATE: 2/15/2024	DESIGNER: KJL
REV:	DATE:	DESIGNER:
REV:	DATE:	DESIGNER:

IO-C-4-4C-DS-0103-FN-US-12-29-2022

**COMBINER DETAIL** 




# residential buildings

Engineered in Germany



#### **MECHANICAL SPECIFICATION**


(1879 mm × 1045 mm × 32 mm)					
48.5 lbs (22.0 kg)					
0.13 in (3.2 mm) thermally pre-stressed glass with anti-reflection technology					
Composite film					
Black anodized aluminum					
6 × 22 monocrystalline Q.ANTUM solar half cells					
2.09-3.98 in × 1.26-2.36 in × 0.59-0.71 in (53-101 mm × 32-60 mm × 15-18 mm), IP67, with bypass diodes					
4mm² Solar cable; (+) ≥49.2in (1250mm), (-) ≥49.2in (1250mm)					
Stäubli MC4; IP68					



#### **ELECTRICAL CHARACTERISTICS**

/ER CLASS			385	390	395	400	405
MUM PERFORMANCE AT STANDARI	D TEST CONDITIO	NS, STC1 (PO	WER TOLERANCE +	5W/-0W)			
Power at MPP <sup>1</sup>	P <sub>MPP</sub>	[W]	385	390	395	400	405
Short Circuit Current <sup>1</sup>	I <sub>sc</sub>	[A]	11.04	11.07	11.10	11.14	11.17
Open Circuit Voltage <sup>1</sup>	V <sub>oc</sub>	[V]	45.19	45.23	45.27	45.30	45.34
Current at MPP	I <sub>MPP</sub>	[A]	10.59	10.65	10.71	10.77	10.83
Voltage at MPP	$V_{MPP}$	[V]	36.36	36.62	36.88	37.13	37.39
Efficiency <sup>1</sup>	η	[%]	≥19.6	≥19.9	≥20.1	≥20.4	≥20.6
MUM PERFORMANCE AT NORMAL	OPERATING CONE	DITIONS, NM	OT <sup>2</sup>				
Power at MPP	P <sub>MPP</sub>	[W]	288.8	292.6	296.3	300.1	303.8
Short Circuit Current	I <sub>sc</sub>	[A]	8.90	8.92	8.95	8.97	9.00
Open Circuit Voltage	V <sub>oc</sub>	[V]	42.62	42.65	42.69	42.72	42.76
Current at MPP	I <sub>MPP</sub>	[A]	8.35	8.41	8.46	8.51	8.57
Voltage at MPP	V <sub>MPP</sub>	[V]	34.59	34.81	35.03	35.25	35.46
	Power at MPPs Short Circuit Currents Open Circuit Voltages Current at MPP Voltage at MPP Efficiencys MUM PERFORMANCE AT NORMAL of Power at MPP Short Circuit Current Open Circuit Voltage Current at MPP	Power at MPP¹         P <sub>MPP</sub> Short Circuit Current¹         I <sub>SC</sub> Open Circuit Voltage¹         V <sub>oc</sub> Current at MPP         I <sub>MPP</sub> Voltage at MPP         V <sub>MPP</sub> Efficiency¹         η           MUM PERFORMANCE AT NORMAL OPERATING COND           Power at MPP         P <sub>MPP</sub> Short Circuit Current         I <sub>SC</sub> Open Circuit Voltage         V <sub>oc</sub> Current at MPP         I <sub>MPP</sub>	Power at MPP¹	Power at MPP¹         P <sub>MPP</sub> [W]         385           Short Circuit Current¹         I <sub>SC</sub> [A]         11.04           Open Circuit Voltage¹         V <sub>OC</sub> [V]         45.19           Current at MPP         I <sub>MPP</sub> [A]         10.59           Voltage at MPP         V <sub>MPP</sub> [V]         36.36           Efficiency¹         η         [%]         ≥19.6           MUM PERFORMANCE AT NORMAL OPERATING CONDITIONS, NMOT²         Power at MPP         P <sub>MPP</sub> [W]         288.8           Short Circuit Current         I <sub>SC</sub> [A]         8.90           Open Circuit Voltage         V <sub>OC</sub> [V]         42.62           Current at MPP         I <sub>MPP</sub> [A]         8.35	Short Circuit Current¹   Isc   [A]   11.04   11.07     Open Circuit Voltage¹   Voc   [V]   45.19   45.23     Current at MPP   I <sub>MPP</sub>   [A]   10.59   10.65     Voltage at MPP   V <sub>MPP</sub>   [V]   36.36   36.62     Efficiency¹   η   [%]   ≥19.6   ≥19.9     MUM PERFORMANCE AT NORMAL OPERATING CONDITIONS, NMOT²   Power at MPP   P <sub>MPP</sub>   [W]   288.8   292.6     Short Circuit Current   I <sub>SC</sub>   [A]   8.90   8.92     Open Circuit Voltage   V <sub>OC</sub>   [V]   42.62   42.65     Current at MPP   I <sub>MPP</sub>   [A]   8.35   8.41	Power at MPP¹         P <sub>MeP</sub> [W]         385         390         395           Short Circuit Current¹         I <sub>SC</sub> [A]         11.04         11.07         11.10           Open Circuit Voltage¹         V <sub>OC</sub> [V]         45.19         45.23         45.27           Current at MPP         I <sub>MEP</sub> [A]         10.59         10.65         10.71           Voltage at MPP         V <sub>MEP</sub> [V]         36.36         36.62         36.88           Efficiency¹         η         [%]         ≥19.6         ≥19.9         ≥20.1           MUM PERFORMANCE AT NORMAL OPERATING CONDITIONS, NMOT²         Power at MPP         P <sub>MEP</sub> [W]         288.8         292.6         296.3           Short Circuit Current         I <sub>SC</sub> [A]         8.90         8.92         8.95           Open Circuit Voltage         V <sub>OC</sub> [V]         42.62         42.65         42.69           Current at MPP         I <sub>MEP</sub> [A]         8.35         8.41         8.46	Power at MIPP¹         P <sub>MPP</sub> (W)         385         390         395         400           Short Circuit Current¹         I <sub>SC</sub> (A)         11.04         11.07         11.10         11.14           Open Circuit Voltage¹         V <sub>CC</sub> (V)         45.19         45.23         45.27         45.30           Current at MIPP         I <sub>MPP</sub> (A)         10.59         10.65         10.71         10.77           Voltage at MIPP         V <sub>MPP</sub> (V)         36.36         36.62         36.88         37.13           Efficiency¹         η (8)         ≥ 19.6         ≥ 19.9         ≥ 20.1         ≥ 20.4           MUM PERFORMANCE AT NORMAL OPERATING CONTIONS, NMOT²         ***         ***         ***         ***         292.6         296.3         300.1         ***           Power at MIPP         P <sub>MSP</sub> (W)         288.8         292.6         296.3         300.1         ***

#### Q CELLS PERFORMANCE WARRANTY



At least 98% of nominal power during first year. Thereafter max. 0.5% degradation per year. At least 93.5% of nominal power up to 10 years. At least 86% of nominal power up to 25 years.

All data within measurement tolerances. Full warranties in accordance with the warranty terms of the Q CELLS sales organisation of your respective country.

# 

Typical module performance under low irradiance conditions in comparison to STC conditions (25°C, 1000 W/m²)

Temperature Coefficient of $I_{BC}$ $\alpha$ [%/K] +0.04 Temperature Coefficient of $V_{OC}$ $\beta$ [%/K] -0.1	MPERATURE COEFFICIENTS	
	mperature Coefficient of I <sub>sc</sub>	-0.27
Temperature Coefficient of P <sub>MPP</sub> y [%/K] -0.34 Nominal Module Operating Temperature NMOT [°F] 109±5.4 (43±3°	mperature Coefficient of P <sub>MPP</sub>	109±5.4 (43±3°C)

#### PROPERTIES FOR SYSTEM DESIGN

Maximum System Voltage V <sub>SYS</sub>	[V]	1000 (IEC)/1000 (UL)	PV module classification	Class II
Maximum Series Fuse Rating	[A DC]	20	Fire Rating based on ANSI/UL 61730	TYPE 2
Max. Design Load, Push / Pull <sup>3</sup>	[lbs/ft <sup>2</sup> ]	75 (3600 Pa) / 55 (2660 Pa)	Permitted Module Temperature	-40°F up to +185°F
Max. Test Load, Push / Pull <sup>3</sup>	[lbs/ft <sup>2</sup> ]	113 (5400 Pa) / 84 (4000 Pa)	on Continuous Duty	(-40°C up to +85°C)

#### **QUALIFICATIONS AND CERTIFICATES**

# CE



				[b]	1 <mark>O-O</mark>	40°HC	
Horizontal	76.4 in	43.3 in	48.0 in	1656lbs	24	24	32
packaging	1940 mm	1100 mm	1220 mm	751kg	pallets	pallets	modules

**PACKAGING INFORMATION** 

Note: Installation instructions must be followed. See the installation and operating manual or contact our technical service department for further information on approved installation and use of this product.


#### Hanwha Q CELLS America Inc.

UL 61730, CE-compliant, Quality Controlled PV - TÜV Rhein IEC 61215:2016 IEC 61730:2016



PRO CUSTOM SOLAR LLC D.B.A. MOMENTUM SOLAR 325 HIGH STREET, METUCHEN, NJ 08840 (732) 902-6224 MOMENTUMSOLAR.COM

# PROFESSIONAL ENGINEERING



Digitally signed by Mina A Makar.
Reason: This item has been
electronically signed and sealed by
[Mina A. Makar, PE 86753, COA #
33404] on the Date and Time Stamp
shown using a digital signature.
Printed copies of this document are
not considered signed and sealed
and the signature must be verified
on any electronic copies

Date: 2024.02.16 09:02:49 -05:00

# **SOLAR CONTRACTOR**

CAMERON CHRISTENSEN
CERTIFIED SOLAR CONTRACTOR LICENSE NUMBER: CVC57036
MOMENTUM SOLAR
5728 MAJOR BLVD. SUITE 307, ORLANDO FL. 32819

#### CUSTOMER INFORMATION

RANDOLPH HORTON - MS145642 1315 SOUTH EAST COUNTY ROAD 245 LAKE CITY, FL 32025 3863657997

#### PV SYSTEM INFORMATION

SYSTEM SIZE (DC ): 11.6 KW
29 MODULES: HANWHA Q.PEAK DUO BLK
ML-G10+ 400
29 INVERTERS: ENPHASE
IQ8PLUS-72-2-US

	PROJECT INFORMA	TION
INITIAL	DATE: 2/15/2024	DESIGNER: KJL
REV:	DATE:	DESIGNER:
REV:	DATE:	DESIGNER:

PANEL DETAIL

SCALE: 1/16" = 1'-0"	ROOF	PANEL COUNT	TILT	AZIMUTH	SHADING	(ROOF AREA 1/2/3)	PORTRAIT MAX SPAN (ROOF AREA 1/2/3)	LANDSCAPE MAX CANTILEVER	PORTRAIT MAX CANTILEVER	
<b>/</b>	R1 R2	14	40° 37°	89° 179°	97% 88%	48 /48 /48 48 /48 /48	48 /48 /48 48 /48 /48	16 /10 /10 16 /10 /10	16 /10 /10 16 /10 /10	momentum
	NZ	13	37	179	6670	40/40/40	40/40/40	10/10/10	10/10/10	PRO CUSTOM SOLAR LLC D.B.A. MOMENTUM SOLAR 325 HIGH STREET, METUCHEN, NJ 08840 (732) 902-6224 MOMENTUMSOLAR.COM
										PROFESSIONAL ENGINEERING
FRONT S COU			RIDGE	3'-(	0" '-2"	——— GROUND ACCESS (TYP) ——— RAFTER SPACING 16" O.C. (TYP)				No PE86753  * STATE OF  * CORIDA  * CONSTANT  * * * * * * * * * * * * * * * * * *
FRONT OF RESIDENCE SOUTH EAST COUNTY ROAD 245		3	3'-0"	R1	1'-9½'		DRIVEWAY			Digitally signed by Mina A Makar. Reason: This item has been electronically signed and sealed by [Mina A. Makar, PE 86753, COA # 33404] on the Date and Time Stan shown using a digital signature. Printed copies of this document ar not considered signed and sealed
	_		3'-0"					TOTAL SQUARE FOOTAGE ( SQUARE FOOTAGE OF SOLA PERCENTAGE OF SOLAR RO	AR ARRAY:612.51 SQFT	and the signature must be verified on any electronic copies Date: 2024.02.16 09:02:49 -05:00
					0	A · · · · · · A		18" RIDGE SETBACK SHALL	BE REQUIRED	CERTIFIED SOLAR CONTRACTOR LICENSE NUMBER: CVC570 MOMENTUM SOLAR 5728 MAJOR BLVD. SUITE 307, ORLANDO FL. 32819  CUSTOMER INFORMATION
		3'-0"		RIDGE		4 · · · · · · · · · · · · · · · · · · ·		SYMBO	L LEGEND	RANDOLPH HORTON - MS145642 1315 SOUTH EAST COUNTY ROAD 245
FIRE SETB	ACK ——	5-0						MSP MAIN SERVICE PANEL	CHIMNEY	LAKE CITY, FL 32025 3863657997
(36" VENTILAT: 36" ROOF ACCI	ESS)			R2	]			SP SUB-PANEL	SKYLIGHT	SYSTEM SIZE (DC): 11.6 KW
(	TYP)		· · · 13'-7½" · ·	· · · · · · · · · · · · · · · · · · ·		· · ·   · · :		M UTILITY METER	VENT	29 MODULES: HANWHA Q.PEAK DUO BI ML-G10+ 400 29 INVERTERS: ENPHASE
			GUT	TER TER				AC DISCONNECT	O PIPE VENT	TIQ8PLUS-72-2-US
		<u>—</u>			SS MSP	_		UDC UTILITY DISCONNECT	FAN	
CLAMPING MAX SPACING IN ZONE 1 48" C AND IN ZONE 2 AND ZONE 3 48" O.C	).C			F	M AC DISC CE			LC LOAD CENTER	SATELLITE DISH	PROJECT INFORMATION
NOTE:  1. ROOF COVERING MATERIAL IS COMPOSE	D OF SING	LE LAYER ASPHALT	COMPOSITE			· · · <del>-</del> · · ·		N3R NEMA 3R BOX W/ ENVOY-S	FIRE SETBACKS	REV: DATE: 2/15/2024 DESIGNER: KJL DESIGNER: KJL DESIGNER:
2. EXACT ATTACHMENT LOCATION AND QUADBLAINED FROM FIELD MEASUREMENTS. T	ANTITY OF HE LOCATI	ATTACHMENTS ARI ON AND QUANTITY	E BASED ON OF ATTACHI	EXISTING RAI MENTS MAY VA	ARY BASED OF	I RAFTER		CB COMBINER BOX	MIN 3'x3' GROUND ACCESS POINT	
LAYOUT START POINT, SPACING VARIATION ADJUST LAYOUT AS REQUIRED. A TILE RC								MODULE	PITCH DIRECTION	ROOF LAYOUT
STAGGERED TILE JOINT LOCATIONS.									WIND PRESSURE ZONE LINES. REFER TO	PV-2

PV MODULE RATINGS		INVERTER RATINGS	VOLTAGE DROP CALCULATIONS									
MODULE MAKE	HANWHA	INVERTER MAKE	ENPHASE FORMULA USED PER NEC HANDBOOK 215.2(A)(4) WHERE APPLICABL							.E		
MODEL Q.PEAK DUO BLK		MODEL	IQ8PLUS-72-2-	WIRE RUN	V <sub>mp</sub>	I <sub>mp</sub>	R	L (FT)	Vo	% V <sub>o</sub>	WIRE SIZE	
	ML-G10+ 400	WODEL	US	BRANCH TO J-BOX	240.00	15.73	1.98	85.58	5.331	2.22%	12 AWG	1
MAX POWER	400W	MAX OUTPUT POWER	290W		240.00						12 AVV	PF
OPEN CIRCUIT VOLTAGE	45.3V	OPEN DC VOLTAGE	60V	J-BOX TO LOAD CENTER	240.00	35.09	1.24	50.00	4.351	1.81%	10 AWG	
MPP VOLTAGE	37.13V	NOMINAL AC VOLTAGE	240V	LOAD CENTER TO AC								
SHORT CIRCUIT CURRENT	11.14A	MAX AC CURRENT	1.21A	DISCONNECT	240.00	43.8625	0.491	3.00	0.129	0.05%	06 AWG	
MPP CURRENT	10.77A	CEC INVERTER EFFICIENCY	97%	AC DISCONNECT TO	240.00	43.8625	0.491	10.00	0.431	0.18%	06 AWG	
NUMBER OF MODULES	29	NUMBER OF INVERTERS	29	INTERCONNECTION								

SUB PANEL BREAKER SIZE

**UL1703 COMPLIANT** 

# OF MODULES PV BREAKER PER BRANCH
UP TO 16 20A

YES


THIS SOLAR PHOTOVOLTAIC SYSTEM COMPLIES WITH THE 2023 FLORIDA BUILDING CODE AND THE 2020 NATIONAL ELECTRICAL CODE

YES

# 29 HANWHA Q.PEAK DUO BLK ML-G10+ 400 400W MODULES PAIRED WITH 29 ENPHASE IQ8PLUS-72-2-US MICRO-INVERTERS

\_UL1703 COMPLIANT

BRANCH CIRCUIT A
13 MICRO-INVERTERS
BRANCH CIRCUIT B
8 MICRO-INVERTERS
BRANCH CIRCUIT C
8 MICRO-INVERTERS

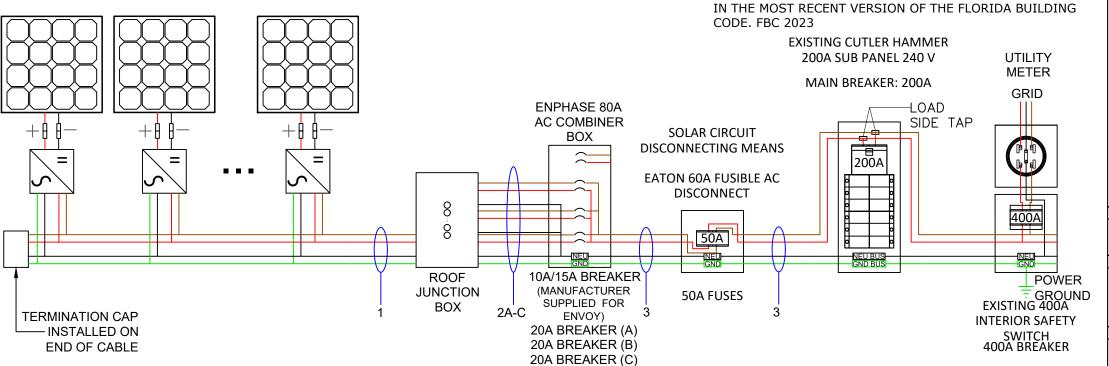


																12
Wire Tag	Conduit	Wire Qty	Wire Gauge	Wire Type	Temp. Rating	Wire Ampacity (A)	Temp. Derate	Conduit Fill Derate	Derated Ampacity (A)	Inverter Qty	NOC (A)	NEC Correction	Design Current (A)	Ground Size	Ground Wire Type	IC
1	OPEN AIR	3	12 AWG	Trunk Cable	90°C	30	0.96	1	28.80	13	1.21	1.25	19.66	12 AWG	Trunk Cable	
2A			10 AWG	THWN-2	75°C	35	0.96		26.88	13	1.21	1.25	19.66			E
2B	3/4" PVC	6	10 AWG	THWN-2	75°C	35	0.96	0.8	26.88	8	1.21	1.25	12.10	08 AWG	THWN-2	IN
2C			10 AWG	THWN-2	75°C	35	0.96		26.88	8	1.21	1.25	12.10			RE
3	3/4" PVC	3 + G	06 AWG	THWN-2	75°C	65	0.96	1	62.40	29	1.21	1.25	43.86	08 AWG	THWN-2	Γ-
4	3/4" PVC	3	06 AWG	THWN-2	75°C	65	0.96	1	62.40	29	1.21	1.25	43.86		THWN-2	H

NOTE: LETTER "G" IN WIRE QTY TAB STANDS FOR GROUNDING CONDUCTOR.



PRO CUSTOM SOLAR LLC D.B.A. MOMENTUM SOLAR 325 HIGH STREET, METUCHEN, NJ 08840 (732) 902-6224 MOMENTUMSOLAR.COM

# PROFESSIONAL ENGINEERING



FSEC CERTIFICATION STATEMENT:
PER FL. STATUE 377.705 , I, MINA A. MAKAR PE# 86753,

CERTIFICATE OF AUTHORIZATION #33404, AN ENGINEER LICENSED PURSUANT TO CHAPTER 471, CERTIFY THAT THE PV

ELECTRICAL SYSTEM AND ELECTRICAL COMPONENTS ARE DESIGNED AND APPROVED USING THE STANDARDS CONTAINED

Digitally signed by Mina A Makar.
Reason: This item has been
electronically signed and sealed by
[Mina A. Makar, PE 86753, COA #
33404] on the Date and Time Stamp
shown using a digital signature.
Printed copies of this document are
not considered signed and sealed
and the signature must be verified
on any electronic copies
Date: 2024.02.16 09:02:49 -05:00

# SOLAR CONTRACTOR

CERTIFIED SOLAR CONTRACTOR LICENSE NUMBER: CVC57036 MOMENTUM SOLAR 5728 MAJOR BLVD. SUITE 307, ORLANDO FL. 32819

# CUSTOMER INFORMATION

RANDOLPH HORTON - MS145642 1315 SOUTH EAST COUNTY ROAD 245 LAKE CITY, FL 32025 3863657997

# **PV SYSTEM INFORMATION**

SYSTEM SIZE (DC ): 11.6 KW
29 MODULES: HANWHA Q.PEAK DUO BLK
ML-G10+ 400
29 INVERTERS: ENPHASE
IQ8PLUS-72-2-US

PROJECT INFORMATION										
INITIAL	DATE: 2/15/2024	DESIGNER: KJL								
REV:	DATE:	DESIGNER:								
REV:	DATE:	DESIGNER:								

THREE LINE DIAGRAM

PV-3

#### **ELECTRICAL NOTES:**

- 1. ALL CALCULATIONS FOR VOC, VMAX, IMP AND ISC HAVE BEEN CALCULATED USING THE MANUFACTURED STRING CALCULATOR BASED ON ASHRAE 2% HIGH AND EXTREME MINIMUM TEMPERATURE COEFFICIENTS.
- THE ENTIRE ARRAY IS BONDED ACCORDING TO (NEC 690.46 250.120 PARAGRAPH C). THE GROUND IS CARRIED AWAY FROM THE GROUNDING LUG USING #6 BARE COPPER WIRE OR #8 THWN-2 COPPER WIRE.
- 3. THIS SYSTEM COMPLIES WITH NEC 2020
- 4. BRANCH CIRCUIT CALCULATION FOR WIRE TAG 1 DISPLAYS THE LARGEST BRANCH CIRCUIT IN SYSTEM. OTHER BRANCH CIRCUITS SHALL HAVE LOWER DESIGN CURRENT THAN THE ONE SHOWN. IN ADDITION, VOLTAGE DROP CALCULATIONS FROM PANELS TO THE COMBINER BOX SHALL BE SHOWN IN A SIMILAR FASHION
- 5. ALL CONDUCTORS ARE SIZED BASED ON NEC 2020 ARTICLE 310
- 6. ALL EQUIPMENT INSTALLED IS RATED AT 75°C
- 7. INVERTER NOC (NOMINAL OPEN CURRENT) OBTAINED FROM EQUIPMENT DATASHEET
- 8. CONTRACTOR SHALL BE RESPONSIBLE FOR COMPLYING WITH ALL LOCAL AND NATIONAL CODE REQUIREMENTS.
- 9. EACH MODULE MUST BE GROUNDED ACCORDING TO USER INSTRUCTIONS
- 10. ALL EQUIPMENT SHALL BE LISTED PER NEC 690.4(B)
- 11. PER NEC 690.13, 690.15, PROVIDE A WARNING SIGN AT ALL LOCATIONS WHERE TERMINALS OF THE DISCONNECTING MEANS MAY BE ENERGIZED IN THE OPEN POSITION> SIGN SHALL READ \*WARNING ELECTRIC SHOCK HAZARD DO NOT TOUCH TERMINALS OR EQUIVALENT.
- 12. PER NEC 705.10, PROVIDE A PERMANENT PLAQUE OR DIRECTORY SHOWING ALL ELECTRIC POWER SOURCES ON THE PREMISES AT SERVICE ENTRANCE.
- 13. INTERCONNECTION METHOD SHALL COMPLY WITH NEC 705.12
- 14. AND OPTION FOR A SINGLE CIRCUIT BRANCH TO BE SPLIT INTO TWO SUB-CIRCUIT BRANCHES IS ACCEPTABLE.
- 15. ALL CONDUCTORS MUST BE COPPER.
- 16. NEUTRAL AND EQUIPMENT GROUNDING CONDUCTOR BONDED AS PER NEC 250.24(C).
- 17. EQUIPMENT GROUNDING CONDUCTOR IS CONNECTED TO A GROUNDING ELECTRODE SYSTEM PER 250.54(D).
- 18. FUSES FOR PV DISCONNECT HAVE AIC RATINGS OF 200KA AC AND 20KA DC.
- 19. SUPPLY SIDE CONNECTION SHALL BE MADE USING ILSCO INSULATION PIERCING CONNECTORS (IPC). MAKE, MODEL, AND RATING OF INTERCONNECTION CAN BE SEEN ON TABLE 1 BELOW.
- 20. METHOD OF INTERCONNECTION CAN BE SEEN IN FIGURE 1.
- 21. UTILITY HAS 24-HR UNRESTRICTED ACCESS TO ALL PHOTOVOLTAIC SYSTEM COMPONENTS LOCATED AT THE SERVICE ENTRANCE.

- 22. WORKING CLEARANCES AROUND THE EXISTING AND NEW ELECTRICAL EQUIPMENT WILL BE MAINTAINED IN ACCORDANCE WITH NEC ARTICLE 110.26.
- 23. CONDUCTORS EXPOSED TO SUNLIGHT SHALL BE LISTED AS SUNLIGHT RESISTANT PER NEC ARTICLE 300.6 (C)(1) AND ARTICLE 310.8 (D).
- 24. CONDUCTORS EXPOSED TO WET LOCATIONS SHALL BE SUITABLE FOR USE IN WET LOCATIONS PER NEC ARTICLE 310.10 (C).
- 25. TOTAL AREA OF ALL CONDUCTORS, SPLICES, AND TAPS INSTALLED AT ANY CROSS SECTION OF THE WIRING DOES NOT EXCEED 75% OF THE CROSS SECTIONAL AREA OF THE SPACE. NEC 312.8(A)(2).
- 26. SYSTEM IS CONSIDERED AN AC MODULE SYSTEM. NO DC CONDUCTORS ARE PRESENT IN CONDUIT, COMBINER, JUNCTION BOX, DISCONNECT. AND COMPLIES WITH 690.6 NO DC DISCONNECT AND ASSOCIATED DC LABELING ARE REQUIRED.
- 27. SYSTEM COMPLIES WITH 690.12 RAPID SHUTDOWN AND ASSOCIATED LABELING AS PER 690.56(C). AC VOLTAGE AND SYSTEM OPERATING CURRENT SHALL BE PROVIDED 690.52.
- 28. CONDUCTORS IN CONDUIT ARE AC CONDUCTORS BRANCH CIRCUITS AND NOT PV SOURCE CIRCUITS. 690.6.
- 29. ALL GROUNDING SHALL COMPLY WITH 690.47(A) IN THAT THE AC MODULES WILL COMPLY WITH 250.64.
- 30. NO TERMINALS SHALL BE ENERGIZED IN THE OPEN POSITION IN THIS AC MODULE SYSTEM 690.13, 690.15, 690.6.
- 31. WHERE APPLICABLE: INTERCONNECTION SHALL COMPLY WITH 705.12(A) OR 705.12(B)
- 32. ALL WARNING SIGN(S) OR LABEL(S) SHALL COMPLY WITH 2020 NEC ARTICLE 110.21(B). LABEL WARNINGS SHALL ADEQUATELY WARN OF THE HAZARD. LABELS SHALL BE PERMANENTLY AFFIXED TO THE EQUIPMENT, AND LABELS REQUIRED SHALL BE SUITABLE FOR THE ENVIRONMENT.
- 33. PV POWER CIRCUIT LABELS SHALL APPEAR ON EVERY SECTION OF THE WIRING SYSTEM THAT IS SEPARATED BY ENCLOSURES. WALLS. PARTITIONS. CEILINGS. OR FLOORS.


#### **TABLE 1:**

MAKE	MODEL	MODEL VOLTAGE RATING		CONDUCTOR RANGE TAP		
ILSCO	IPC 4006	600 V	4/0-4 AWG	6-14 AWG		
ILSCO	IPC 4020	600 V	4/0-2 AWG	2/0-6 AWG		

#### INSTRUCTIONS FOR LINE TAPS

#### FIGURE 1:


- ADJUST THE CONNECTOR NUT TO SUITABLE LOCATION
- 2. PUT THE BRANCH WIRE INTO THE CAP SHEATH FULLY
- 3. INSERT THE MAIN WIRE, IF THERE ARE TWO LAYS OF INSULATED LAY IN THE MAIN CABLE, SHOULD STRIP A CERTAIN LENGTH OF THE FIRST INSULATED LAY FROM INSERTED END
- 4. TURN THE NUT BY HAND, AND FIX THE CONNECTOR IN SUITABLE LOCATION.
- 5. SCREW THE NUT WITH THE SLEEVE SPANNER.
- 6. SCREW THE NUT CONTINUALLY UNTIL THE TOP PART IS CRACKED AND DROPPED DOWN

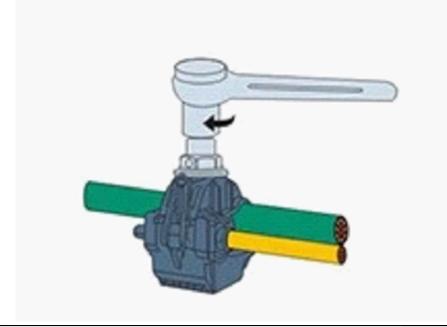



PRO CUSTOM SOLAR LLC D.B.A. MOMENTUM SOLAR 325 HIGH STREET, METUCHEN, NJ 08840 (732) 902-6224 MOMENTUMSOLAR.COM

# PROFESSIONAL ENGINEERING



Digitally signed by Mina A Makar.
Reason: This item has been
electronically signed and sealed by
[Mina A. Makar, PE 86753, COA #
33404] on the Date and Time Stamp
shown using a digital signature.
Printed copies of this document are
not considered signed and sealed
and the signature must be verified
on any electronic copies
Date: 2024.02.16 09:02:49 -05:00

# SOLAR CONTRACTOR

CAMERON CHRISTENSEN
CERTIFIED SOLAR CONTRACTOR LICENSE NUMBER: CVC57036
MOMENTUM SOLAR
5728 MAJOR BLVD. SUITE 307, ORLANDO FL. 32819

#### **CUSTOMER INFORMATION**

RANDOLPH HORTON - MS145642 1315 SOUTH EAST COUNTY ROAD 245 LAKE CITY, FL 32025 3863657997


# PV SYSTEM INFORMATION

SYSTEM SIZE (DC ): 11.6 KW
29 MODULES: HANWHA Q.PEAK DUO BLK
ML-G10+ 400
29 INVERTERS: ENPHASE
IQ8PLUS-72-2-US

PROJECT INFORMATION		
INITIAL	DATE: 2/15/2024	DESIGNER: KJL
REV:	DATE:	DESIGNER:
REV:	DATE:	DESIGNER:

ELECTRICAL CONT.

**PV-3.1** 

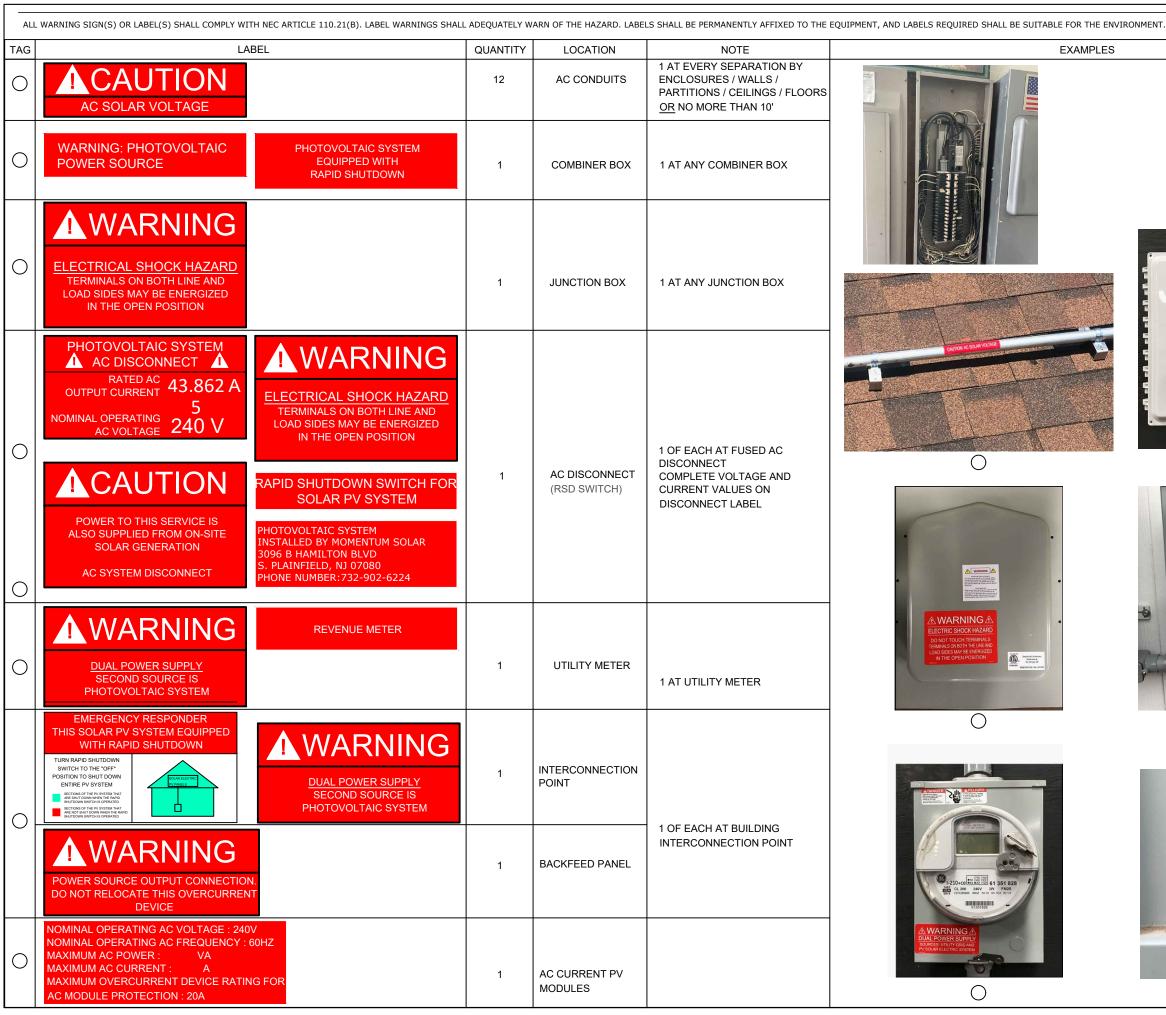







 $\bigcirc$ 














PRO CUSTOM SOLAR LLC D.B.A. MOMENTUM SOLAR 325 HIGH STREET, METUCHEN, NJ 08840 (732) 902-6224 MOMENTUMSOLAR.COM

# **PROFESSIONAL ENGINEERING**



Digitally signed by Mina A Makar. Reason: This item has been electronically signed and sealed by [Mina A. Makar, PE 86753, COA # 33404] on the Date and Time Stamp shown using a digital signature. Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies Date: 2024.02.16 09:02:49 -05:00

#### **SOLAR CONTRACTOR**

MOMENTUM SOLAR 5728 MAJOR BLVD. SUITE 307, ORLANDO FL. 32819

#### **CUSTOMER INFORMATION**

RANDOLPH HORTON - MS145642 1315 SOUTH EAST COUNTY ROAD 245 LAKE CITY, FL 32025 3863657997

#### **PV SYSTEM INFORMATION**

SYSTEM SIZE (DC): 11.6 KW 29 MODULES: HANWHA Q.PEAK DUO BLK ML-G10+ 400 29 INVERTERS: ENPHASE IQ8PLUS-72-2-US

PROJECT INFORMATION				
INITIAL	DATE: 2/15/2024	DESIGNER: KJL		
REV:	DATE:	DESIGNER:		
REV:	DATE:	DESIGNER:		

**EQUIPMENT LABELS** 

**PV-3.2**